

Overvoltage Protection

SafeTec T2 3+0

Class II • Type 2 • Type 1CA



Location of Use: Sub-distribution Boards
 Network Systems: TN-C
 Mode of Protection: L-PEN
 IEC/EN/UL Category: Class II / Type 2 / Type 1CA
 Safety: Current Limiting Technology
 Housing: Pluggable Design
 Compliance: IEC 61643-11:2011
 EN 61643-11:2012+A11:2018
 UL 1449 5th Edition


Technical Data

SafeTec T2-xxx-3+0(-R)		150	300	350	480	550	750	880
IEC Electrical								
Nominal AC Voltage (50/60Hz)	U_o/U_n	120 V	240 V	277 V	400 V	400 V	600 V	600 V
Maximum Continuous Operating Voltage (AC)	U_c	150 V	300 V	350 V	480 V	550 V	750 V	880 V
Nominal Discharge Current (8/20 μ s)	I_n	20 kA	20 kA	20 kA	20 kA	20 kA	20 kA	20 kA
Maximum Discharge Current (8/20 μ s)	I_{max}	50 kA	50 kA	50 kA	50 kA	50 kA	35 kA	35 kA
Voltage Protection Level	U_p	1250 V	1650 V	1750 V	2300 V	2500 V	3500 V	3600 V
Response Time	t_A	< 25 ns						
Overcurrent Protection (max)		315 A/250 A gG						
Short-Circuit Current Rating (AC)	I_{SCCR}	25 kA/50 kA						
TOV Withstand 120min	U_T	255 V	442 V	529 V	762 V	918 V	1200 V	1250 V
Number of Ports		1						
UL Electrical								
Maximum Continuous Operating Voltage (AC)	MCOV	150 V	300 V	350 V	480 V	550 V	750 V	880 V
Voltage Protection Rating	VPR	700 V	1200 V	1200 V	1500 V	1800 V	2500 V	2500 V
Nominal Discharge Current (8/20 μ s)	I_n	20 kA	20 kA	20 kA	20 kA	20 kA	20 kA	20 kA
Short-Circuit Current Rating (AC)	SCCR	200 kA	150 kA	200 kA	200 kA	200 kA	200 kA	200 kA
Additional Electrical Parameters (Tests performed within Raycap testing laboratory only)								
Residual Voltage at 5 kA (8/20 μ s)	U_{res}	750 V	1000 V	1300 V	1600 V	1900 V	2700 V	2800 V
Overcurrent Protection (min)		80 A gG						
Mechanical & Environmental								
Operating Temperature Range	T_a	-40 °F to +185 °F [-40 °C to +85 °C]						
Permissible Operating Humidity	RH	5%...95%						
Altitude (max)		13123 ft [4000m]						
Terminal Screw Torque	M_{max}	40 lbf-in [4.5Nm]						
Conductor Cross Section (max)		2 AWG (Solid, Stranded) / 4 AWG (Flexible) 35 mm ² (Solid, Stranded) / 25 mm ² (Flexible)						
Mounting		35 mm DIN Rail, EN 60715						
Degree of Protection		IP 20 (built-in)						
Housing Material		Thermoplastic: Extinguishing Degree UL 94 V-0						
Thermal Protection		Yes						
Operating State / Fault Indication		Green Flag / Not Green Flag						
Remote Contacts (RC)		Optional						
RC Switching Capacity		AC: 250V/1A, 125V/1A; DC: 48V/0.5A, 24V/0.5A, 12V/0.5A						
RC Conductor Cross Section (max)		16 AWG (Solid) / 1.5mm ² (Solid)						

Internal Configuration

Legend

- L Line Conductor Terminal
- ⏏ PEN/G Conductor Terminal
- RC Remote Contacts Terminal (Optional)
- TC Thermal Control Function
- TD Thermal Disconnect

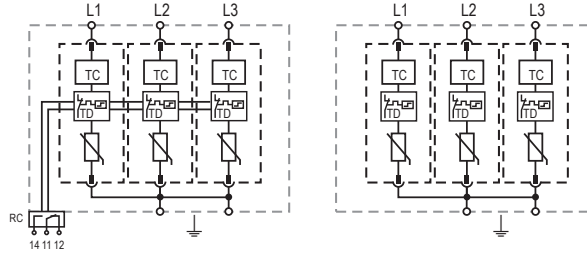


SafeTec T2-xxx-3+0(-R)

Order Information

Order Code	150	300	350	480	550	750	880
SafeTec T2-xxx-3+0	59.0162	59.0164	59.0166	59.0168	59.0170	59.0172	59.0174
SafeTec T2-xxx-3+0-R (with remote contacts)	59.0163	59.0165	59.0167	59.0169	59.0171	59.0173	59.0175
SafeTec T2-xxx-P (plug)	59.0126	59.0127	59.0128	59.0129	59.0299	59.0130	59.0131

Dimensions & Packaging


inches [mm]

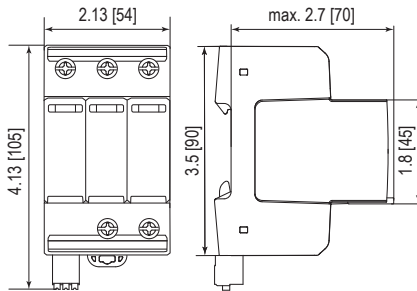

Complete Unit

SafeTec T2-xxx-3+0	150	300	350	480	550	750	880	
Weight	pounds	.846	.866	.919	.926	.959	1.012	1.025
	grams	384	393	417	420	435	459	465
SafeTec T2-xxx-3+0-R								
Weight	pounds	.866	.886	.939	.946	.979	1.031	1.045
	grams	393	402	426	429	444	468	474
DIN 43880 Dimension	3 TE / 2.13" [54]							
Packaging Dimensions (HxWxL)	4.3 x 4.5 x 13.8" [109 x 115 x 352 mm]							
Standard Order Quantity	5 Units							

Spare Plug



Single Unit

SafeTec T2-xxx-P	150	300	350	480	550	750	880	
Weight	pounds	.139	.146	.163	.165	.176	.194	.198
	grams	63	66	74	75	80	88	90
DIN 43880 Dimension	1 TE / .71" [18]							
Packaging Dimensions (HxWxL)	3.2 x 4.5 x 12" [83 x 116 x 305 mm]							
Standard Order Quantity	24 Units							