

Overvoltage Protection **ProTec T2-ADV 2+0**

Class II • Type 2 • Type 1CA • Open Type 1 SPD Listed



Location of Use: Sub-Distribution Boards
 Network Systems: TN-S
 Mode of Protection: L-PE, N-PE
 IEC/EN/UL Category: Class II / Type 2 / Type 1CA
 Open Type 1 SPD Listed
 Housing: Pluggable Design
 Compliance: IEC 61643-11:2011
 EN 61643-11:2012+A11:2018
 UL 1449 5th Edition


Technical Data

ProTec T2-ADV-xxx-2+0(-R) & ProTec T2-ADV-xxx-2+0(-US)(-R)		75	150	300	350	480
IEC Electrical						
Nominal AC Voltage (50/60Hz)	U_o / U_n	60V	120V	240V	277V	400V
Maximum Continuous Operating Voltage (AC)	U_c	75V	150V	300V	350V	480V
Nominal Discharge Current (8/20 μ s)	I_n	20kA	20kA	20kA	20kA	20kA
Maximum Discharge Current (8/20 μ s)	I_{max}	50kA	50kA	50kA	50kA	50kA
Voltage Protection Level	U_p	600V	1000V	1300V	1700V	2000V
Response Time	t_A	< 25ns				
Overcurrent Protection (max)		160A gG				
Short-Circuit Current Rating (AC)	I_{SCCR}	50kA				
TOV Withstand 5s	U_T	114V	229V	337V	403V	581V
TOV 120min	U_T	114V	229V	442V	528V	762V
	mode	Withstand	Withstand	Safe Fail	Safe Fail	Safe Fail
Number of Ports		1				
UL Electrical						
Maximum Continuous Operating Voltage (AC)	MCOV	75V	150V	300V	350V	480V
Voltage Protection Rating	VPR	400V	600V	900V	1200V	1500V
Nominal Discharge Current (8/20 μ s)	I_n	20kA	20kA	20kA	20kA	20kA
Short-Circuit Current Rating (AC)	SCCR	100kA	200kA	150kA	200kA	200kA
Additional Electrical Parameters - Standard (Tests performed within Raycap testing laboratory only)						
Residual Voltage at 5 kA (8/20 μ s)	U_{res}	400V	700V	1000V	1300V	1600V
Overcurrent Protection (min)		80A gG				
Additional Electrical Parameters - Extended (Additionally tested by VDE)						
Short-Circuit Current Rating (AC)	I_{SCCR}	100kA				
Overcurrent Protection (max)		160A gG				
Mechanical & Environmental						
Operating Temperature Range	T_a	-40 °F to +185 °F [-40 °C to +85 °C]				
Permissible Operating Humidity	RH	5%...95%				
Altitude (max)		13123 ft [4000m]				
Terminal Screw Torque	M_{max}	35 lbf-in per UL 1499 [4.5 Nm]				
Conductor Cross Section (max)		6 AWG (Solid, Stranded) per UL 1449 35 mm ² (Solid, Stranded) / 25 mm ² (Flexible)				
Mounting		35 mm DIN Rail, EN 60715				
Degree of Protection		IP 20 (built-in)				
Housing Material		Thermoplastic: Extinguishing Degree UL 94 V-0				
Thermal Protection		Yes				
Operating State / Fault Indication		Green Flag / Not Green Flag				
Remote Contacts (RC)		Optional				
RC Switching Capacity		AC: 250V/1A, 125V/1A; DC: 48V/0.5A, 24V/0.5A, 12V/0.5A				
RC Conductor Cross Section (max)		10 AWG (Solid, Stranded) per UL 1449 [1.5 mm ² (Solid)]				

Internal Configuration

Legend

- L Line Conductor Terminal
- N Neutral Conductor Terminal
- ⏚ PE/G Conductor Terminal
- RC Remote Contacts Terminal (Optional)
- TD Thermal Disconnect

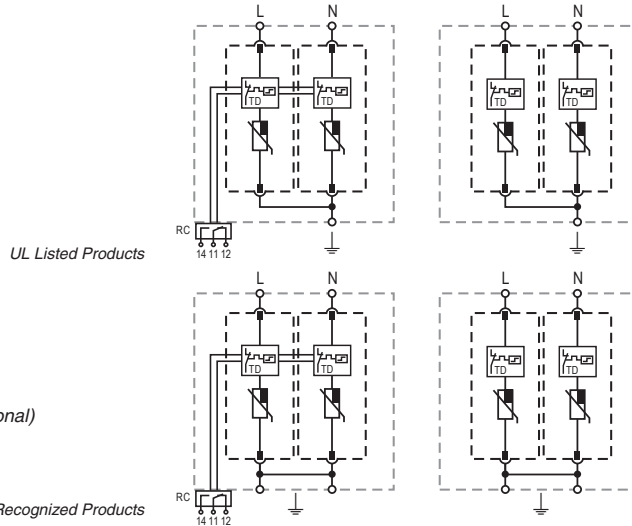

ProTec T2-ADV-xxx-2+0(-R)

Order Information VDE Certified and UL Recognized Products

Order Code	75	150	300	350	480
ProTec T2-ADV-xxx-2+0	59.0347	59.0220	59.0222	59.0224	59.0226
ProTec T2-ADV-xxx-2+0-R (with remote contacts)	59.0348	59.0221	59.0223	59.0225	59.0227
ProTec T2-ADV-xxx-P (plug)	59.0202	59.0203	59.0204	59.0205	59.0206

ProTec T2-ADV-xxx-2+0-US(-R)


For UL Listed products one PE/G Conductor Terminal is covered/closed.

Order Information VDE Certified and Open Type 1 UL Listed Products

Order Code	75	150	300	350	480
ProTec T2-ADV-xxx-2+0-US	59.B145	59.B147	59.B149	59.B151	59.B153
ProTec T2-ADV-xxx-2+0-US-R (with remote contacts)	59.B146	59.B148	59.B150	59.B152	59.B154
ProTec T2-ADV-xxx-P (plug)	59.0202	59.0203	59.0204	59.0205	59.0206

Dimensions & Packaging

inches [mm]

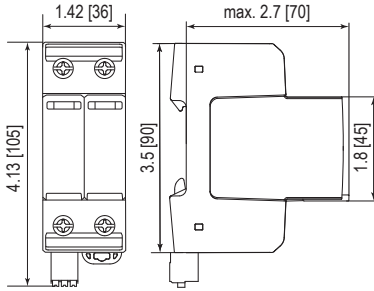

Complete Unit UL Recognized Products

ProTec T2-ADV-xxx-2+0	75	150	300	350	480	
Weight	pounds	.544	.562	.593	.615	.637
	grams	247	255	269	279	289

ProTec T2-ADV-xxx-2+0-R

Weight	pounds	.575	.593	.610	.646	.668
	grams	261	269	277	293	303

Complete Unit UL Listed Products

ProTec T2-ADV-xxx-2+0-US	75	150	300	350	480	
Weight	pounds	.524	.542	.573	.595	.617
	grams	238	246	260	270	280

ProTec T2-ADV-xxx-2+0-US-R


Weight	pounds	.555	.573	.590	.626	.648
	grams	252	260	268	284	294

DIN 43880 Dimension 2 TE / 1.42" [36]

Packaging Dimensions (HxWxL) 4.3 x 4.5 x 13.8" [109 x 115 x 352 mm]

Standard Order Quantity 7 Units

Spare Plug



Single Unit Dimensions & Packaging

ProTec T2-ADV-xxx-P	75	150	300	350	480	
Weight	pounds	.120	.127	.143	.154	.165
	grams	54	58	65	70	75

DIN 43880 Dimension 1 TE / .71" [18]

Packaging Dimensions (HxWxL) 3.2 x 4.5 x 12" [83 x 116 x 305 mm]

Standard Order Quantity 24 Units