

# Overvoltage Protection ProTec T2-ADV 4+0

**Class II • Type 2 • Type 1CA • Open Type 1 SPD Listed**



Location of Use: Sub-Distribution Boards  
 Network Systems: TN-S  
 Mode of Protection: L-PE, N-PE  
 IEC/EN/UL Category: Class II / Type 2 / Type 1CA  
 Open Type 1 SPD Listed  
 Housing: Pluggable Design  
 Compliance: IEC 61643-11:2011  
 EN 61643-11:2012+A11:2018  
 UL 1449 5th Edition

## Technical Data

**ProTec T2-ADV-xxx-4+0(-R) & ProTec T2-ADV-xxx-4+0(-US)(-R)**

**150                      300                      350                      480**

### IEC Electrical

Nominal AC Voltage (50/60Hz)	$U_o / U_n$	120V	240V	277V	400V
Maximum Continuous Operating Voltage (AC)	$U_c$	150V	300V	350V	480V
Nominal Discharge Current (8/20 $\mu$ s)	$I_n$	20kA	20kA	20kA	20kA
Maximum Discharge Current (8/20 $\mu$ s)	$I_{max}$	50kA	50kA	50kA	50kA
Voltage Protection Level	$U_p$	1000V	1300V	1700V	2000V
Response Time	$t_A$	< 25 ns			
Overcurrent Protection (max)		160A gG			
Short-Circuit Current Rating (AC)	$I_{SCCR}$	50kA			
TOV Withstand 5s	$U_T$	229V	337V	403V	581V
TOV 120min	$U_T$	229V	442V	528V	762V
	mode	Withstand	Safe Fail	Safe Fail	Safe Fail
Number of Ports		1			

### UL Electrical

Maximum Continuous Operating Voltage (AC)	MCOV	150V	300V	350V	480V
Voltage Protection Rating	VPR	600V	900V	1200V	1500V
Nominal Discharge Current (8/20 $\mu$ s)	$I_n$	20kA	20kA	20kA	20kA
Short-Circuit Current Rating (AC)	SCCR	200kA	150kA	200kA	200kA

### Additional Electrical Parameters - Standard (Tests performed within Raycap testing laboratory only)

Residual Voltage at 5 kA (8/20 $\mu$ s)	$U_{res}$	700V	1000V	1300V	1600V
Overcurrent Protection (min)		80A gG			


### Additional Electrical Parameters - Extended (Additionally tested by VDE)

Short-Circuit Current Rating (AC)	$I_{SCCR}$	100kA			
Overcurrent Protection (max)		160A gG			

### Mechanical & Environmental

Operating Temperature Range	$T_a$	-40 °F to +185 °F [-40 °C to +85 °C]			
Permissible Operating Humidity	RH	5%...95%			
Altitude (max)		13123 ft [4000m]			
Terminal Screw Torque	$M_{max}$	35 lbf-in per UL 1499 [4.5 Nm]			
Conductor Cross Section (max)		6 AWG (Solid, Stranded) per UL 1449 35 mm <sup>2</sup> (Solid, Stranded) / 25 mm <sup>2</sup> (Flexible)			
Mounting		35 mm DIN Rail, EN 60715			
Degree of Protection		IP 20 (built-in)			
Housing Material		Thermoplastic: Extinguishing Degree UL 94 V-0			
Thermal Protection		Yes			
Operating State / Fault Indication		Green Flag / Not Green Flag			
Remote Contacts (RC)		Optional			
RC Switching Capacity		AC: 250V/1A, 125V/1A; DC: 48V/0.5A, 24V/0.5A, 12V/0.5A			
RC Conductor Cross Section (max)		10 AWG (Solid, Stranded) per UL 1449 [1.5 mm <sup>2</sup> (Solid)]			

## Internal Configuration

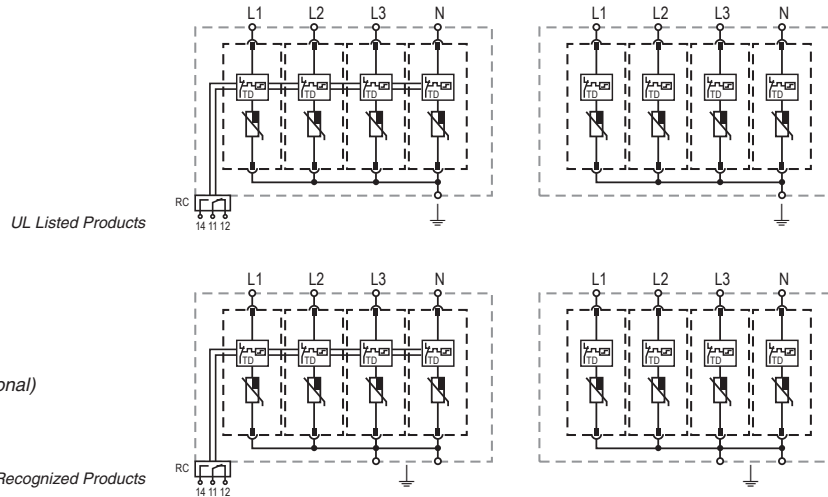

### Legend

- L Line Conductor Terminal
- N Neutral Conductor Terminal
- ⏚ PE/G Conductor Terminal
- RC Remote Contacts Terminal (Optional)
- TD Thermal Disconnecter

### ProTec T2-ADV-xxx-4+0(-R)

#### Order Information VDE Certified and UL Recognized Products

Order Code	150	300	350	480
ProTec T2-ADV-xxx-4+0	59.0236	59.0238	59.0240	59.0242
ProTec T2-ADV-xxx-4+0-R (with remote contacts)	59.0237	59.0239	59.0241	59.0243
ProTec T2-ADV-xxx-P (plug)	59.0203	59.0204	59.0205	59.0206

### ProTec T2-ADV-xxx-4+0-US(-R)


For UL Listed products one PE/G Conductor Terminal is covered/closed.

#### Order Information VDE Certified and Open Type 1 UL Listed Products

Order Code	150	300	350	480
ProTec T2-ADV-xxx-4+0-US	59.B163	59.B165	59.B167	59.B169
ProTec T2-ADV-xxx-4+0-US-R (with remote contacts)	59.B164	59.B166	59.B168	59.B170
ProTec T2-ADV-xxx-P (plug)	59.0203	59.0204	59.0205	59.0206

## Dimensions & Packaging

inches [mm]

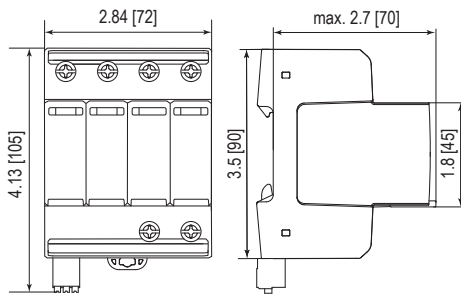

#### Complete Unit UL Recognized Products

ProTec T2-ADV-xxx-4+0	150	300	350	480	
Weight	pounds	1.087	1.148	1.192	1.236
	grams	493	521	541	561

#### ProTec T2-ADV-xxx-4+0-R

Weight	pounds	1.106	1.168	1.212	1.256
	grams	502	530	550	570

#### Complete Unit UL Listed Products

ProTec T2-ADV-xxx-4+0-US	150	300	350	480	
Weight	pounds	1.067	1.128	1.172	1.216
	grams	484	512	532	552

#### Pro Tec T2-ADV-xxx-4+0-US-R

Weight	pounds	1.086	1.148	1.192	1.236
	grams	493	521	541	561

DIN 43880 Dimension

4 TE / 2.84" [72]


Packaging Dimensions (HxWxL)

4.3 x 4.5 x 13.8" [109 x 115 x 352 mm]

Standard Order Quantity

4 Units

## Spare Plug



#### Single Unit Dimensions & Packaging

ProTec T2-ADV-xxx-P	150	300	350	480	
Weight	pounds	.127	.143	.154	.165
	grams	58	65	70	75

DIN 43880 Dimension

1 TE / .71" [18]

Packaging Dimensions (HxWxL)

3.2 x 4.5 x 12" [83 x 116 x 305 mm]

Standard Order Quantity

24 Units