


Surge Protective Devices (SPDs) for Coaxial & RF Systems

Coaxial & RF Systems

Special features:

- Very high surge ratings
- Equipped with various types of terminals
- High frequency range (up to 250MHz) suitable for all DSL lines
- Robust metal housing

RayCox BNC
RayCox IEC, F
RayDat CP BNC
RayDat CP 7/16
RayDat CP N
RayDat CP N-6G
RayDat CP TNC-6G
RayDat CP UHF
RayDat CP F75
RayDat CP TV75
RayDat CP SMA-MF

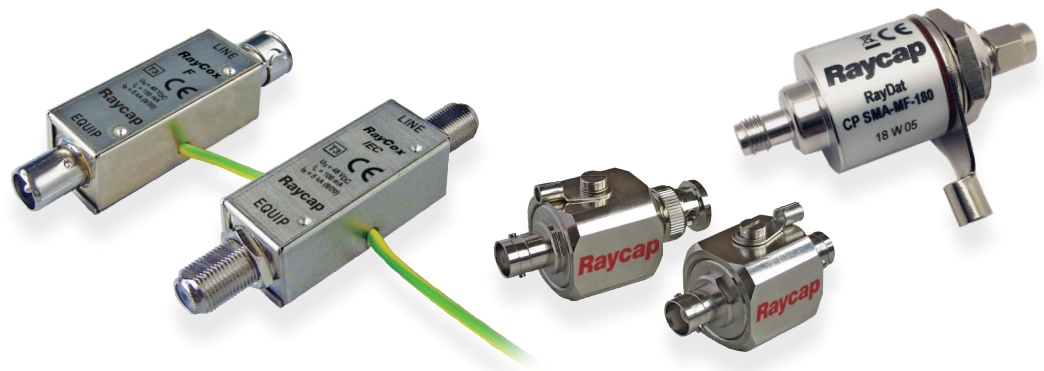

Symbol Legend:



Compact Design



Quick Connect Terminals



Plug-In Connection



Shield Directly Grounded

Coaxial protection devices are intended to protect TV sets, aerial amplifiers, CCTV/ CATV systems as well as RF antenna systems. Moreover, they are suitable for frequencies up to 6 GHz.

The careful design, low capacitance gas discharge arresters and high-quality termination connectors ensure a minimum of insertion loss throughout the frequency band.

Surge protection devices are designed to match the requirements for 50 Ohm or 75 Ohm typical impedance. Different types of connectors (BNC, IEC TV, BNC, 7/16, N, TNC UHF and SMA) are used to enable easy installation.

The CP coaxial cable protectors are designed in accordance with IEC 61643-21: 2012 standards and regulations.

DATA SHEET

Coaxial SPD for Analog Video Surveillance Systems

RayCox BNC Series**C1 • C2 • C3**

IEC/EN Category: C1/C2/C3
 Surge Discharge Ratings: I_n : 10kA, I_{max} : 20kA
 Voltages: 10, 24VDC
 Max. Operating Voltage: 12, 24VDC
 Frequency Range: 100MHz
 Series Load Current: 100mA
 Enclosure: In-line Installation
 Termination: BNC Connectors
 Housing: Shielded Enclosure
 Compliance: IEC/EN 61643-21


**Technical Data**

BNC		BNC 5		BNC 12	
Electrical					
Nominal Operating Voltage (DC)		U _n	10V	24V	
Maximum Continuous Operating Voltage (DC)		U _c	12V	28V	
Rated Operating Current at 25°C		I _L		100mA	
C2 Nominal Discharge Current (8/20µs)		I _n		10kA	
Maximum Discharge Current (8/20µs)		I _{max}		20kA	
Residual Voltage at 5 kA (8/20µs)	(Wire-Shield)	U _{res}	<35V	<65V	
Rated Spark Overvoltage	(Wire-Shield)		13.5V – 16.5V	30V – 36V	
	(Shield-Ground)		72V – 108V	72V – 108V	
Response Time Overvoltage Protection	(Wire-Shield)	t _A		< 10 ns	
	(Shield-Ground)			< 100 ns	
Insulation Resistance of Protection	(Wire-Shield)	R _{iso}	≥ 12 MΩ	≥ 28 MΩ	
	(Shield-Ground)			≥ 1 GΩ	
Serial Resistance per Path		R		9 – 11 Ω	
Transverse Capacitance	(Wire-Shield)	C		30 pF	
	(Shield-Ground)			1 pF	
Cut-off Frequency		f _G		100 MHz	
Transmission Rate				16 Mbit/s	
Mechanical					
Temperature Range			-40 °F to +176 °F [-40 °C to +80 °C]		
Connection			BNC Connector		
Degree of Protection IEC/EN 60529			IP 20 (built-in)		
Housing Material			Metal		
Order Information					
Order Code		BNC 5		BNC 12	
BNC xx		7050.22		7050.13	


RayCox BNC Series

Internal Configuration

- Legend**
- BD Bi-directional TVS Diode
 - C Capacitor
 - GDT Gas Discharge Tube
 - PG Protective Grounding
 - R Resistor

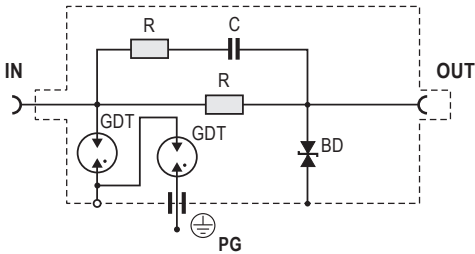

Dimensions & Packaging

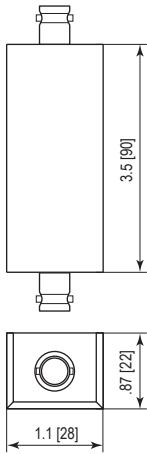

BNC	BNC 5	BNC 12
Dimensions		
Weight per Unit		2.04 oz [58 g]
Packaging Dimensions (Single Unit)		5.5 × 7.9" [140 × 200 mm]


inches
[mm]

Information contained in this document is subject to change at any time without notice.



DATA SHEET

Coaxial SPD for TV & Cable TV

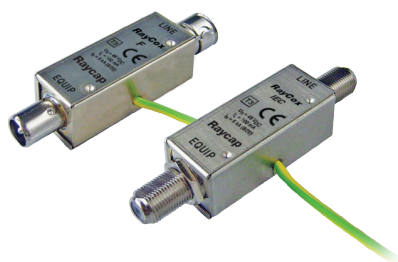RayCox IEC 48, F 48**C1 • C2 • C3**

IEC/EN Category: C1/C2/C3
 Surge Discharge Ratings: I_n : 5 kA
 Voltages: 48 VDC
 Max. Operating Voltage: 60 VDC
 Frequency Range: 40–860 MHz
 Series Load Current: 100 mA
 Termination: IEC TV or F Connectors
 Housing: In-line Installation, Shielded Enclosure
 Compliance: IEC/EN 61643-21


**Technical Data**

IEC 48		F 48
Electrical		
Nominal Operating Voltage (DC)	U _n	48V
Maximum Continuous Operating Voltage (DC)	U _c	60V
Rated Operating Current at 25°C	I _L	100mA
C2 Nominal Discharge Current (8/20μs)	I _n	5 kA
Residual Voltage at 5 kA (8/20μs)	U _{res}	< 500V
Rated Spark Overvoltage (Wire-Shield)		90V – 110V
Response Time Overvoltage Protection (Wire-Shield)	t _A	< 25 ns
Insulation Resistance of Protection (Wire-Shield)	R _{iso}	≥ 6 MΩ
Serial Resistance per Path	R	< 0.1 Ω
Frequency Range	f _G	40 – 860 MHz
Mechanical		
Temperature Range	-40 °F to +176 °F [-40 °C to +80 °C]	
Connection	TV Connector	F Connector
Degree of Protection IEC/EN 60529	IP 20 (built-in)	
Housing Material	Metal	
Order Information		
Order Code	IEC 48	F 48
XXX 48	125 093	125 094



RayCox IEC 48, F 48

Internal Configuration

- Legend
- C Capacitor
 - L Inductor
 - MOV Metal Oxide Varistor
 - PG Protective Grounding

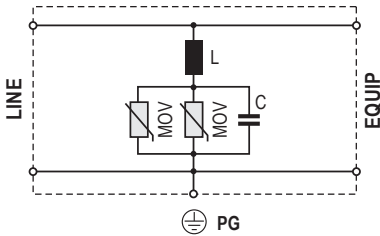

Dimensions & Packaging

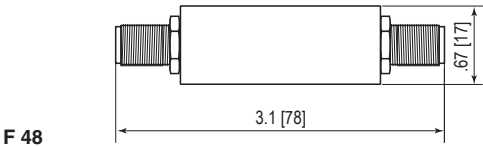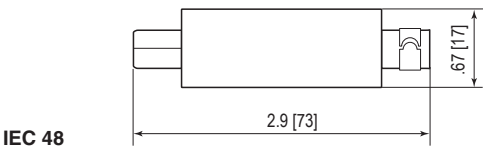

	IEC 48	F 48
Dimensions		
Weight per Unit	1.13 oz [32 g]	
Packaging Dimensions (Single Unit)	3.5 × 5.9" [90 × 150 mm]	

inches
[mm]

Information contained in this document is subject to change at any time without notice.





IEC/EN Category: C1/C2/C3

 Surge Discharge Ratings: I_n : 10 kA, I_{max} : 20 kA

Max. Operating Voltage: 70, 180, 280 V

Maximum Peak Power: 40, 125, 300 W

Frequency Range: DC–2.6 GHz

 Impedance: 50 Ω

Insertion Loss: < 0.4 dB

Return Loss: > 20 dB

Termination: BNC Type (F-F, M-F)

Housing: In-line Installation, Shielded Enclosure

Compliance: IEC/EN 61643-21



Technical Data

CP BNC		70	180	280
Electrical				
Maximum Continuous Operating Voltage	U _c	70V	180V	280V
Maximum Peak Power	P _{max}	40W	125W	300W
C2 Nominal Discharge Current (8/20μs)	I _n		10kA	
Maximum Discharge Current (8/20μs)	I _{max}		20kA	
Residual Voltage at (1 kV/μs)	U _{res}	<600V	<700V	<900V
Impedance	Z		50 Ω	
Insertion Loss	I _L		<0.4 dB	
Return Loss	R _L		>20 dB	
Insulation Resistance of Protection	R _{iso}		>10 GΩ	
Frequency Range	f _G		0–2.6 GHz	
Mechanical				
Temperature Range		-40 °F to +176 °F [-40 °C to +80 °C]		
Connection		BNC Female/Female		BNC Male/Female
Degree of Protection IEC/EN 60529		IP 20 (built-in)		
Housing Material		Metal		
Order Information				
Order Code		70	180	280
CP BNC-FF-xxx		800 850	800 851	800 852
CP BNC-MF-xxx		800 853	800 854	800 855


RayDat CP BNC Series

Internal Configuration

Legend
GDT Gas Discharge Tube
PE Ground

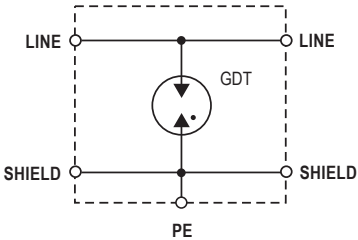

Dimensions & Packaging

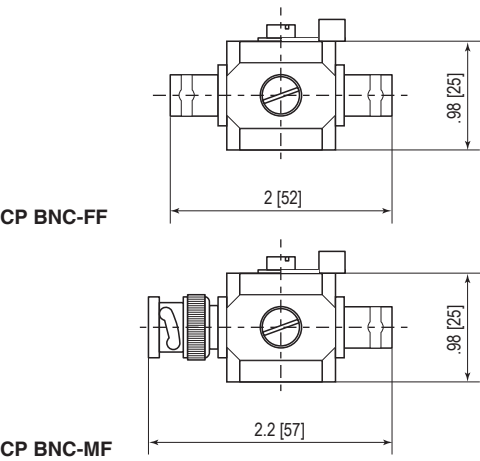

CP BNC	CP BNC-FF-xxx			CP BNC-MF-xxx		
	70	180	280	70	180	280
Dimensions						
Weight per Unit	3.74 oz [106g]			4.02 oz [114g]		
Packaging Dimensions (Single Unit)	2.9 × 1.2 × 1.2" [73 × 30 × 30mm]					
Minimum Package Quantity	100 pieces					

inches
[mm]

Information contained in this document is subject to change at any time without notice.

RoHS COMPLIANT  CE

DATA SHEET

In-line SPD for Coaxial & RF Systems

RayDat CP 7/16 Series**C1 • C2 • C3****CCP-7/16 Series**

IEC/EN Category: C1/C2/C3
 Surge Discharge Ratings: I_n : 10 kA, I_{max} : 20 kA
 Max. Operating Voltage: 70, 180, 280 V
 Maximum Peak Power: 40, 125, 300 W
 Frequency Range: DC–2.5 GHz
 Impedance: 50 Ω
 Insertion Loss: < 0.2 dB
 Return Loss: > 20 dB
 Termination: 7/16 Type (M-F)
 Housing: Bulkhead Installation,
 Shielded Enclosure
 Compliance: IEC/EN 61643-21


**Technical Data**

CP 7/16-MF		70	180	280
Electrical				
Maximum Continuous Operating Voltage	U _c	70V	180V	280V
Maximum Peak Power	P _{max}	40W	125W	300W
C2 Nominal Discharge Current (8/20μs)	I _n		10kA	
Maximum Discharge Current (8/20μs)	I _{max}		20kA	
Residual Voltage at (1 kV/μs)	U _{res}	<600V	<700V	<900V
Impedance	Z		50Ω	
Insertion Loss	I _L		<0.2dB	
Return Loss	R _L		>20dB	
Insulation Resistance of Protection	R _{iso}		>10GΩ	
Frequency Range	f _G		0–2.5 GHz	
Mechanical				
Temperature Range		-40 °F to +176 °F [-40 °C to +80 °C]		
Connection		7/16 Male/Female		
Degree of Protection IEC/EN 60529		IP 20 (built-in)		
Housing Material		Metal		
Order Information				
Order Code		70	180	280
CP 7/16-MF-xxx		800 856	800 857	800 858


RayDat CP 7/16 Series

Internal Configuration

Legend
GDT Gas Discharge Tube
PE Ground

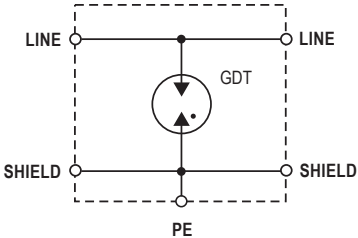

Dimensions & Packaging

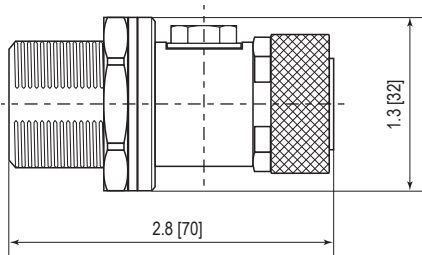

CP 7/16-MF	70	180	280
Dimensions			
Weight per Unit	7.7 oz [218 g]		
Packaging Dimensions (Single Unit)	3.2 × 1.6 × 1.6" [82 × 40 × 40 mm]		
Minimum Package Quantity	100 pieces		

inches
[mm]

Information contained in this document is subject to change at any time without notice.

RoHS COMPLIANT  CE

DATA SHEET

In-line SPD for Coaxial & RF Systems

RayDat CP N Series**C1 • C2 • C3**

IEC/EN Category: C1/C2/C3

Surge Discharge Ratings: I_n : 10 kA, I_{max} : 20 kA

Max. Operating Voltage: 70, 180, 280 V

Maximum Peak Power: 40, 125, 300 W

Frequency Range: DC–2.6 GHz

Impedance: 50 Ω

Insertion Loss: < 0.4 dB

Return Loss: > 20 dB

Termination: N Type (F-F, M-F)

Housing: In-line Installation, Shielded Enclosure

Compliance: IEC/EN 61643-21


**Technical Data**

CP-N		70	180	280
Electrical				
Maximum Continuous Operating Voltage	U _c	70 V	180 V	280 V
Maximum Peak Power	P _{max}	40 W	125 W	300 W
C2 Nominal Discharge Current (8/20 μs)	I _n	10 kA		
Maximum Discharge Current (8/20 μs)	I _{max}		20 kA	
Residual Voltage at (1 kV/μs)	U _{res}	< 600 V	< 700 V	< 900 V
Impedance	Z		50 Ω	
Insertion Loss	I _L		< 0.4 dB	
Return Loss	R _L		> 20 dB	
Insulation Resistance of Protection	R _{iso}		> 10 GΩ	
Frequency Range	f _G		0–2.6 GHz	
Mechanical				
Temperature Range		-40 °F to +176 °F [-40 °C to +80 °C]		
Connection		N Female/Female		N Male/Female
Degree of Protection IEC/EN 60529		IP 20 (built-in)		
Housing Material		Metal		
Order Information				
Order Code		70	180	280
CP N-FF-xxx		800 859	800 860	800 861
CP N-MF-xxx		800 862	800 863	800 864

RayDat CP N Series


Internal Configuration

Legend
 GDT Gas Discharge Tube
 PE Ground

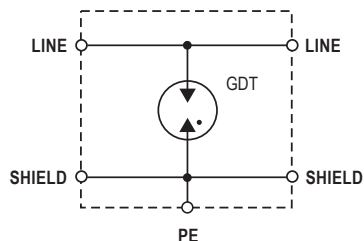


Dimensions & Packaging

CP N-FF



CP N-MF



CP N	CP N-FF-xxx			CP N-MF-xxx		
	70	180	280	70	180	280
Dimensions						
Weight per Unit	4.87 oz [138g]			5.01 oz [142g]		
Packaging Dimensions (Single Unit)	2.9 × 1.2 × 1.2" [73 × 30 × 30 mm]					
Minimum Package Quantity	100 pieces					

inches
[mm]

Information contained in this document is subject to change at any time without notice.

RoHS
COMPLIANT  **CE**

Raycap

www.raycap.com

© 2020 Raycap All rights reserved.
G29-00-052 201120

DATA SHEET

In-line SPD for High Frequency Coaxial & RF Systems

RayDat CP N-6G Series**C1 • C2 • C3**

IEC/EN Category: C1/C2/C3
 Surge Discharge Ratings: I_n : 10 kA, I_{max} : 20 kA
 Max. Operating Voltage: 180 V
 Maximum Peak Power: 125 W
 Frequency Range: DC–6.0 GHz
 Impedance: 50 Ω
 Insertion Loss: < 0.4 dB
 Return Loss: > 20 dB
 Termination: N Type (F-F, M-F)
 Housing: Bulkhead Installation,
 Shielded Enclosure
 Compliance: IEC/EN 61643-21

**Technical Data****CP N-6G****CP N-6G-FF****CP N-6G-MF****Electrical**

Maximum Continuous Operating Voltage	U_c	180 V
Maximum Peak Power	P_{max}	125 W
C2 Nominal Discharge Current (8/20 μ s)	I_n	10 kA
Maximum Discharge Current (8/20 μ s)	I_{max}	20 kA
Residual Voltage at (1 kV/ μ s)	U_{res}	< 700 V
Impedance	Z	50 Ω
Insertion Loss	I_L	< 0.4 dB
Return Loss	R_L	> 20 dB
Insulation Resistance of Protection	R_{iso}	> 10 G Ω
Frequency Range	f_G	0–6.0 GHz

Mechanical

Temperature Range	-40 °F to +176 °F [-40 °C to +80 °C]	
Connection	N Female/Female	N Male/Female
Degree of Protection IEC/EN 60529	IP 20 (built-in)	
Housing Material	Metal	

Order Information


Order Code		
CP N-6G-XX	800 865	800 866

RayDat CP N-6G Series



Internal Configuration

Legend

GDT Gas Discharge Tube
PE Ground

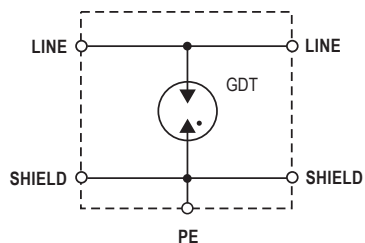

Dimensions & Packaging

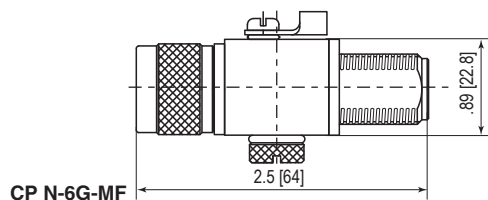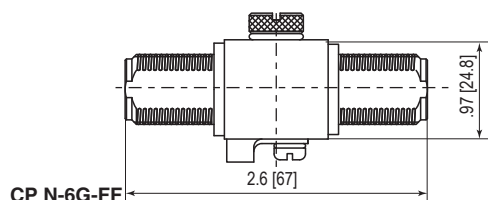

CP N-6G

CP N-6G-FF

CP N-6G-MF

Dimensions

Weight per Unit	4.65 oz [132 g]	4.58 oz [130 g]
Packaging Dimensions (Single Unit)	2.9 × 1.2 × 1.2" [73 × 30 × 30 mm]	
Minimum Package Quantity	100 pieces	

inches
[mm]

Information contained in this document is subject to
change at any time without notice.

RoHS
COMPLIANT  CE

Raycap

www.raycap.com

© 2020 Raycap All rights reserved.
G29-00-053 201120

DATA SHEET

In-line SPD for High Frequency Coaxial & RF Systems

RayDat CP TNC-6G Series**C1 • C2 • C3**

IEC/EN Category: C1/C2/C3
 Surge Discharge Ratings: I_n : 10kA, I_{max} : 20kA
 Max. Operating Voltage: 180V
 Maximum Peak Power: 125W
 Frequency Range: DC–6.0GHz
 Impedance: 50 Ω
 Insertion Loss: <0.4dB
 Return Loss: >20dB
 Termination: TNC Type (F-F, M-F)
 Housing: In-line Installation, Shielded Enclosure
 Compliance: IEC/EN 61643-21

**Technical Data****CP TNC-6G****CP TNC-6G-FF****CP TNC-6G-MF****Electrical**

Maximum Continuous Operating Voltage	U_c	180V
Maximum Peak Power	P_{max}	125W
C2 Nominal Discharge Current (8/20 μ s)	I_n	10kA
Maximum Discharge Current (8/20 μ s)	I_{max}	20kA
Residual Voltage at (1 kV/ μ s)	U_{res}	<700V
Impedance	Z	50 Ω
Insertion Loss	I_L	<0.4dB
Return Loss	R_L	>20dB
Insulation Resistance of Protection	R_{iso}	>10 G Ω
Frequency Range	f_G	0–6.0 GHz

Mechanical

Temperature Range	-40 °F to +176 °F [-40 °C to +80 °C]	
Connection	TNC Female/Female	TNC Male/Female
Degree of Protection IEC/EN 60529	IP 20 (built-in)	
Housing Material	Metal	


Order Information

Order Code		
CP TNC-6G-XX	800 867	800 868


RayDat CP TNC-6G Series

Internal Configuration


Legend
GDT Gas Discharge Tube
PE Ground

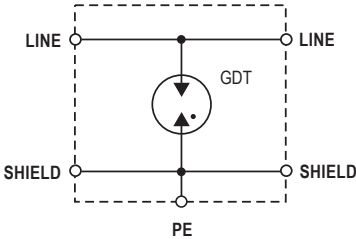

Dimensions & Packaging

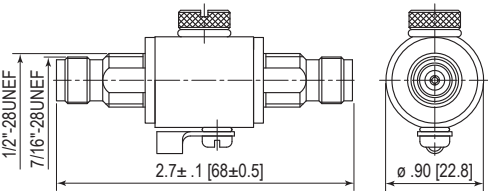

CP TNC-6G-FF

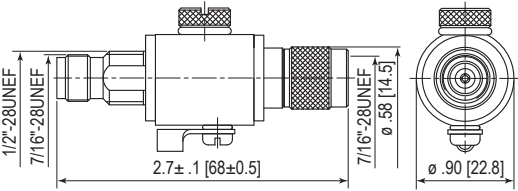

CP TNC-6G-MF

CP TNC-6G	CP TNC-6G-FF	CP TNC-6G-MF
Dimensions		
Weight per Unit	4.6 oz [130 g]	4.51 oz [128 g]
Packaging Dimensions (Single Unit)	2.9 × 1.2 × 1.2" [73 × 30 × 30 mm]	
Minimum Package Quantity	100 pieces	

inches
[mm]

Information contained in this document is subject to change at any time without notice.

RoHS COMPLIANT  CE

DATA SHEET

In-line SPD for Coaxial & RF Systems

RayDat CP UHF Series**C1 • C2 • C3**

IEC/EN Category: C1/C2/C3

Surge Discharge Ratings: I_n : 10 kA, I_{max} : 20 kA

Max. Operating Voltage: 70, 180, 280 V

Maximum Peak Power: 40, 125, 300 W

Frequency Range: DC–600 MHz

Impedance: 50 Ω

Insertion Loss: < 0.4 dB

Return Loss: > 20 dB

Termination: UHF Type (F-F, M-F)

Housing: In-line Installation, Shielded Enclosure

Compliance: IEC/EN 61643-21


**Technical Data**

CP UHF		70	180	280
Electrical				
Maximum Continuous Operating Voltage	U _c	70V	180V	280V
Maximum Peak Power	P _{max}	40W	125W	300W
C2 Nominal Discharge Current (8/20μs)	I _n		10kA	
Maximum Discharge Current (8/20μs)	I _{max}		20kA	
Residual Voltage at (1kV/μs)	U _{res}	<600V	<700V	<900V
Impedance	Z		50Ω	
Insertion Loss	I _L		<0.4dB	
Return Loss	R _L		>20dB	
Insulation Resistance of Protection	R _{iso}		>10GΩ	
Frequency Range	f _G		0–600MHz	
Mechanical				
Temperature Range		-40 °F to +176 °F [-40 °C to +80 °C]		
Connection		UHF Female/Female		UHF Male/Female
Degree of Protection IEC/EN 60529		IP 20 (built-in)		
Housing Material		Metal		
Order Information				
Order Code		70	180	280
CP UHF-FF-xxx		800 869	800 870	800 871
CP UHF-MF-xxx		800 872	800 873	800 874


RayDat CP UHF Series

Internal Configuration

Legend
GDT Gas Discharge Tube
PE Ground

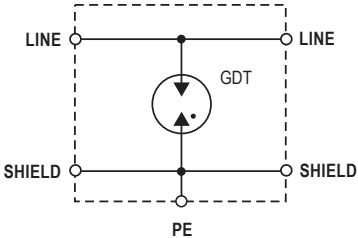

Dimensions & Packaging

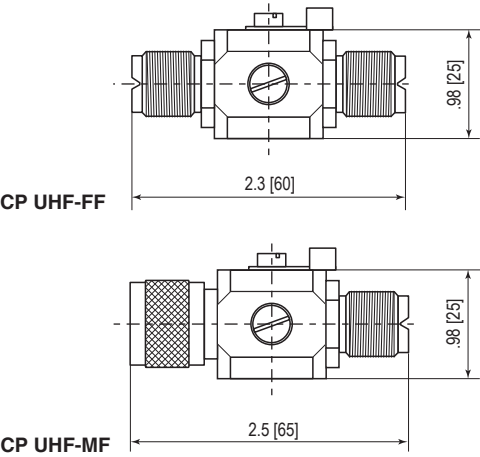

CP UHF	CP UHF-FF-xxx			CP UHF-MF-xxx		
	70	180	280	70	180	280
Dimensions						
Weight per Unit	3.67 oz [104g]			3.67 oz [104g]		
Packaging Dimensions (Single Unit)	2.4 x 1.2 x 1.4" [62 x 30 x 35mm]					
Minimum Package Quantity	100 pieces					

inches
[mm]

Information contained in this document is subject to change at any time without notice.

RoHS COMPLIANT  CE

DATA SHEET

In-line SPD for Coaxial & RF Systems

RayDat CP F75 Series**C1 • C2 • C3**

IEC/EN Category: C1/C2/C3
 Surge Discharge Ratings: I_n : 10 kA, I_{max} : 20 kA
 Max. Operating Voltage: 70, 180 V
 Maximum Peak Power: 40, 125 W
 Frequency Range: DC–2.0 GHz
 Impedance: 75 Ω
 Insertion Loss: < 0.4 dB
 Return Loss: > 20 dB
 Termination: F Type (F-F, M-F)
 Housing: In-line Installation, Shielded Enclosure
 Compliance: IEC/EN 61643-21

**Technical Data****CP F75****70****180****Electrical**

Maximum Continuous Operating Voltage	U_c	70 V	180 V
Maximum Peak Power	P_{max}	40 W	125 W
C2 Nominal Discharge Current (8/20 μ s)	I_n	10 kA	
Maximum Discharge Current (8/20 μ s)	I_{max}	20 kA	
Residual Voltage at (1 kV/ μ s)	U_{res}	< 600 V	< 700 V
Impedance	Z	75 Ω	
Insertion Loss	I_L	< 0.4 dB	
Return Loss	R_L	> 20 dB	
Insulation Resistance of Protection	R_{iso}	> 10 G Ω	
Frequency Range	f_G	0–2.0 GHz	

Mechanical

Temperature Range	-40 °F to +176 °F [-40 °C to +80 °C]		
Connection	F Female/Female	F Male/Female	
Degree of Protection IEC/EN 60529	IP 20 (built-in)		
Housing Material	Metal		


Order Information

Order Code	70	180
CP F75-FF-xxx	800 875	800 876
CP F75-MF-xxx	800 877	800 878


RayDat CP F75 Series

Internal Configuration


Legend
GDT Gas Discharge Tube
PE Ground

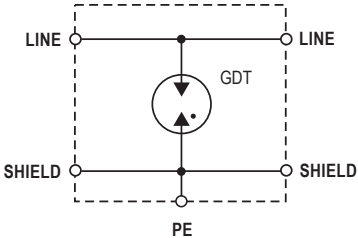

Dimensions & Packaging

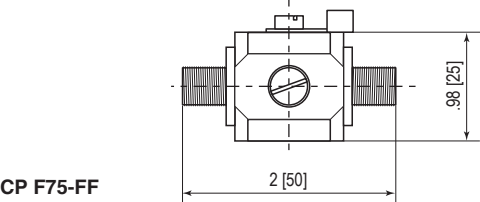

CP F75-FF

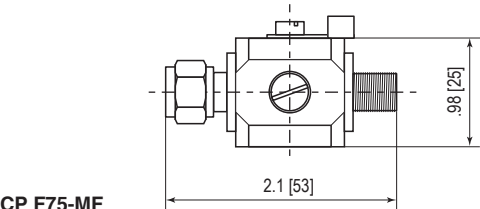

CP F75-MF

CP F75	CP F75-FF		CP F75-MF	
	70	180	70	180
Dimensions				
Weight per Unit	2.82 oz [80g]		2.96 oz [84g]	
Packaging Dimensions (Single Unit)	2.8 x 1.2 x 1.2" [73 x 30 x 30mm]			
Minimum Package Quantity	100 pieces			

inches
[mm]

Information contained in this document is subject to change at any time without notice.



DATA SHEET

In-line SPD for Coaxial & RF Systems

RayDat CP TV75 Series**C1 • C2 • C3**

IEC/EN Category: C1/C2/C3
 Surge Discharge Ratings: I_n : 10 kA, I_{max} : 20 kA
 Max. Operating Voltage: 70, 180 V
 Maximum Peak Power: 40, 125 W
 Frequency Range: DC–2.0 GHz
 Impedance: 75 Ω
 Insertion Loss: < 0.4 dB
 Return Loss: > 20 dB
 Termination: TV Type (F-F, M-F)
 Housing: In-line Installation, Shielded Enclosure
 Compliance: IEC/EN 61643-21

**Technical Data****CP TV75****70****180****Electrical**

Maximum Continuous Operating Voltage	U_c	70 V	180 V
Maximum Peak Power	P_{max}	40 W	125 W
C2 Nominal Discharge Current (8/20 μ s)	I_n	10 kA	
Maximum Discharge Current (8/20 μ s)	I_{max}	20 kA	
Residual Voltage at (1 kV/ μ s)	U_{res}	< 600 V	< 700 V
Impedance	Z	75 Ω	
Insertion Loss	I_L	< 0.4 dB	
Return Loss	R_L	> 20 dB	
Insulation Resistance of Protection	R_{iso}	> 10 G Ω	
Frequency Range	f_G	0–2.0 GHz	

Mechanical

Temperature Range	-40 °F to +176 °F [-40 °C to +80 °C]	
Connection	TV Female/Female	TV Male/Female
Degree of Protection IEC/EN 60529	IP20 (built-in)	
Housing Material	Metal	


Order Information

Order Code	70	180
CP TV75-FF-xx	800 879	800 880
CP TV75-MF-xx	800 881	800 882

RayDat CP TV75 Series


Internal Configuration

Legend
GDT Gas Discharge Tube
PE Ground

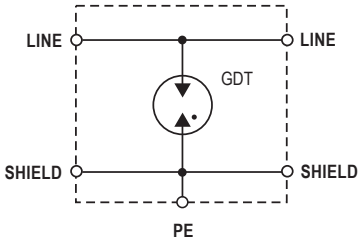


Dimensions & Packaging

CP TV75-FF



CP TV75-MF



CP TV75	CP TV75-FF-xxx		CP TV75-MF-xxx	
	70	180	70	180
Dimensions				
Weight per Unit	2.82 oz [80g]		2.89 [82 g]	
Packaging Dimensions (Single Unit)	2.8 × 1.2 × 1.2" [73 × 30 × 30 mm]			
Minimum Package Quantity	100 pieces			

inches
[mm]

Information contained in this document is subject to change at any time without notice.

RoHS COMPLIANT  CE

DATA SHEET

In-line SPD for Coaxial & RF Systems

RayDat CP-SMA Series**D1 • C1 • C2 • C3**

IEC/EN Category: D1/C1/C2/C3
 Surge Discharge Ratings: I_n : 5 kA, I_{max} : 10 kA, I_{imp} : 1 kA
 Max. Operating Voltage: 180 V
 Maximum Peak Power: 125 W
 Frequency Range: DC–6 GHz
 Impedance: 50 Ω
 Insertion Loss: < 0.25 dB
 Return Loss: > 20 dB
 Termination: SMA Type (M-F)
 Housing: In-line Installation, Shielded Enclosure
 Compliance: IEC/EN 61643-21

**Technical Data****CP-SMA****180****Electrical**

Maximum Continuous Operating Voltage	U_c	180 V
Maximum Peak Power	P_{max}	125 W
C2 Nominal Discharge Current (8/20 μ s)	I_n	5 kA
Maximum Discharge Current (8/20 μ s)	I_{max}	10 kA
D1 Impulse Discharge Current (10/350 μ s)	I_{imp}	1 kA
Residual Voltage at (1 kV/ μ s)	U_{res}	1600 V
Impedance	Z	50 Ω
Insertion Loss	I_L	< 0.25 dB
Return Loss	R_L	> 20 dB
Insulation Resistance of Protection at U_c	R_{iso}	> 10 G Ω
Frequency Range	f_G	0–6.0 GHz

Mechanical

Temperature Range	-40 °C to +80 °C
Connection	SMA Male to SMA Female
Degree of Protection IEC/EN 60529	IP 20
Housing Material	Metal


Order Information

CP-SMA-MF-180	800 887
---------------	---------


RayDat CP-SMA Series

Internal Configuration

Legend
GDT Gas Discharge Tube
PE Ground



Dimensions & Packaging



CP-SMA	180
Dimensions	
Weight per Unit	2.40oz [68g]
Packaging Dimensions (Single Unit)	20.84 × 1.58 × 1.58" [72 × 40 × 40mm]
Minimum Package Quantity	100 pieces

inches
[mm]

Information contained in this document is subject to change at any time without notice.

RoHS COMPLIANT  CE