

DATA SHEET

Strikesorb®


The RSx-D series are AC Disconnect, Load Center and Surge Protection Devices that are Suitable for Use as Service Equipment (SUSE). They are designed to provide robust overvoltage surge protection for up to 10 AC power circuits for today's small cell radio systems.

AC Disconnect with Integrated Surge Protection for Small Cell Radio Heads

RSx-DMN-X02MS-21NN
RSx-DMC-X02MS-21NN] 60A Main Breaker

RSx-DMN-Z02MS-21NN
RSx-DMC-Z02MS-21NN] 100A Main Breaker

Use (x) character in model prefix to indicate enclosure color option
D: Light Gray G: Green B: Black N: Brown L: Blue

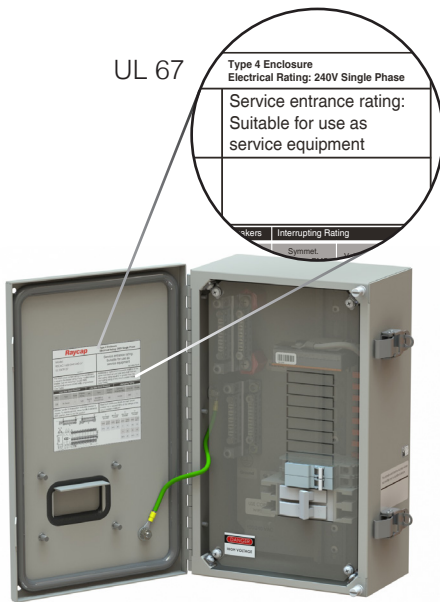

RSD-DMC-Z02MS-21NN

(Lt. Gray color, 2 Breakers, Strikesorb SPD,
External Disconnect)

Mounting Bracket Included

Features

- Suitable for Use as Service Equipment (SUSE) without condition per UL and NEC with 60A or 100A main breaker
- Up to ten circuits for individual power control and over current protection
- Comes standard with 2x 1-Pos or 1x 2-Pos din-rail breakers (2A to 25A)
- 120/240VAC split phase configuration
- Available Surge Protection:
 - Strikesorb 30-A-2CHV Surge Protective Device (SPD)
 - Class I SPD, certified by VDE per the IEC 61643-11 standard as suitable for installation in areas where induced lightning exposure is expected
 - Withstand direct surge currents up to 5kA (10/350µs) and induced surge currents of up to 60kA (8/20)
 - Low let through / clamping voltage - as it does not employ spark gaps or other switching elements
- Lockable front hatch access to the main breaker (Optional). Main power can be turned on and off without opening the main enclosure door. Lockout Tagout (LOTO) functionality.
- Pole mount bracket facilitates mounting on up to 4" diameter pole using existing clamps. Can also be banded to any diameter pole. Center mount holes (5/8") for center pole mount.
- Top, bottom or side cable entry allows for cleaner installations
- Customer specified knockouts available
- Patent pending design

Benefits

- Offers unique maintenance free protection
- NEMA 4 rated enclosure, allowing for installation in harsh environments
- Lightweight design allows easy installation

Raycap

www.raycap.com

Strikesorb is a registered trademark of Raycap
© 2020 Raycap All rights reserved.
G02-01-739 190917

SPECIFICATIONS

Strikesorb®

AC Disconnect with Integrated Surge Protection for Small Cell Radio Heads

RSx-DMN-X02MS-21NN
RSx-DMC-X02MS-21NN] 60A Main Breaker

RSx-DMN-Z02MS-21NN
RSx-DMC-Z02MS-21NN] 100A Main Breaker

Product Information

Strikesorb SPD Models

Model Number		RSx-DMN-X02MS-21NN
	Number of Circuits	Available up to 10 circuits
	Service Disconnect	60A main breaker
		RSx-DMC-X02MS-21NN
	Number of Circuits	Available up to 10 circuits
	Service Disconnect	60A main breaker (with external disconnect)
		RSx-DMN-Z02MS-21NN
	Number of Circuits	Available up to 10 circuits
	Service Disconnect	100A main breaker
		RSx-DMC-Z02MS-21NN
	Number of Circuits	Available up to 10 circuits
	Service Disconnect	100A main breaker (with external disconnect)
Breakers		13mm DIN Rail
Breakers Provided*		2x 1-Pos or 1x 2-Pos din-rail breakers (2A to 25A)
Breaker Interrupt Rating (kAIC)		10kA
Connection (Power)		Main Breaker #12 - #20 AWG (3.31 - 67.4mm ²)
		Branch Breaker #14 - #2 AWG (2.5 - 6mm ²)
		Ground and Neutral Busbars #14 - #2 AWG (2.08 - 33.6mm ²)
Enclosure Type (Outdoor)		Powder Coated Steel
Enclosure		Hinged with Padlockable Latches
Environmental Ingress Protection (IP) Rating		NEMA 4
Operation Temperature (°C)		-40° C to +80° C
Storage Temperature (°C)		-40° C to +80° C
Dimensions (W x H x D)		9.10" x 13.87" x 6.05" [231 x 352 x 154 mm]
Weight (including 2 Breakers) lbs.		Unit: 14.1 Bracket: 2.2 System: 16.3

Surge Suppression Specifications

Surge Protection Device (SPD) Type to UL	Strikesorb 30-A-2CHV Surge Suppression
Surge Protective Device (SPD) Type per UL 1449 4th Ed.	Recognized UL SPD
Surge Protection Device (SPD) Class to IEC 61643-11	Class I
Nominal Operating Voltage [U _n]	120V / 240V split phase
Nominal Discharge Current [I _n] per UL 1449 4th Ed.	20 kA 8/20 μs
Maximum Discharge Current [I _{max}] per IEC 61643-11	60 kA 8/20 μs
Impulse Discharge Current [I _{imp}] per IEC 61643-11	5 kA 10/350 μs
Maximum Continuous Operating Voltage [U _c] (MCOV)	150V per line
Voltage Protection Level [U _p] per IEC 61643-11	700V
Suppression Technology	MOV
Protection Modes	L1 to Neutral, L2 to Neutral

Standards Compliance & Certifications

Strikesorb modules are compliant to the following Surge Protective Device (SPD) standards:

UL 1449 4th Edition: 2011, IEC 61643-11: 2011, EN 61643-11: 2012, IEEE C62.11: 2005, IEEE C62.41: 2002, IEEE C62.45: 2002, NEMA-LS-1

Certification	UL, VDE, CE
Panel Board Certification	UL 67 Pending (suitable for use as service equipment)

*Additional breakers and sizes are available and sold separately.

Raycap

www.raycap.com



AWG=American Wire Gauge

G02-01-739 190917

DATA SHEET

Strikesorb®

The RSx-D series are AC Disconnect, Load Center and Surge Protection Devices that are Suitable for Use as Service Equipment (SUSE). They are designed to provide robust overvoltage surge protection for up to 10 AC power circuits for today's small cell radio systems.

AC Disconnect with Integrated Surge Protection for Small Cell Radio Heads

RSx-DMN-X10MS-21NN] 60A Main Breaker
RSx-DMC-X10MS-21NN]

RSx-DMN-Z10MS-21NN] 100A Main Breaker
RSx-DMC-Z10MS-21NN]

Use (x) character in model prefix to indicate enclosure color option
D: Light Gray G: Green B: Black N: Brown L: Blue



UL 67

Type 4 Enclosure Electrical Rating: 240V Single Phase	
Service entrance rating: Suitable for use as service equipment	
Class	Interrupting Rating
Symmet	Asym



RSD-DMC-Z10MS-21NN

(Lt. Gray color, 10 Breakers, Strikesorb SPD,
External Disconnect)

Mounting Bracket Included

Features

- Suitable for Use as Service Equipment (SUSE) without condition per UL and NEC with 60A or 100A main breaker
- Up to ten circuits for individual power control and over current protection
- Comes standard with 10x 1-Pos, 5x 2-Pos or other combination of din-rail breakers (2A to 25A)
- 120/240VAC split phase configuration
- Available Surge Protection:
 - Strikesorb 30-A-2CHV Surge Protective Device (SPD)
 - Class I SPD, certified by VDE per the IEC 61643-11 standard as suitable for installation in areas where induced lightning exposure is expected
 - Withstand direct surge currents up to 5kA (10/350µs) and induced surge currents of up to 60kA (8/20)
 - Low let through / clamping voltage - as it does not employ spark gaps or other switching elements
- Lockable front hatch access to the main breaker (Optional). Main power can be turned on and off without opening the main enclosure door. Lockout Tagout (LOTO) functionality.
- Pole mount bracket facilitates mounting on up to 4" diameter pole using existing clamps. Can also be banded to any diameter pole. Center mount holes (5/8") for center pole mount.
- Top, bottom or side cable entry allows for cleaner installations
- Customer specified knockouts available
- Patent pending design

Benefits

- Offers unique maintenance free protection
- NEMA 4 rated enclosure, allowing for installation in harsh environments
- Lightweight design allows easy installation

Raycap

www.raycap.com

Strikesorb is a registered trademark of Raycap
© 2020 Raycap All rights reserved.
G02-01-730 200511

SPECIFICATIONS

Strikesorb®

AC Disconnect with Integrated Surge Protection for Small Cell Radio Heads

RSx-DMN-X10MS-21NN] 60A Main Breaker
RSx-DMC-X10MS-21NN
RSx-DMN-Z10MS-21NN] 100A Main Breaker
RSx-DMC-Z10MS-21NN

Product Information		Strikesorb SPD Models
Model Number		RSx-DMN-X10MS-21NN Available up to 10 circuits
	Number of Circuits	60A main breaker
	Service Disconnect	
		RSx-DMC-X10MS-21NN Available up to 10 circuits
	Number of Circuits	60A main breaker (with external disconnect)
	Service Disconnect	
		RSx-DMN-Z10MS-21NN Available up to 10 circuits
	Number of Circuits	100A main breaker
	Service Disconnect	
		RSx-DMC-Z10MS-21NN Available up to 10 circuits
	Number of Circuits	100A main breaker (with external disconnect)
	Service Disconnect	
Breakers		13mm DIN Rail
Breakers Provided*		10x 1-Pos, 5x 2-Pos or other combination (2A to 25A)
Breaker Interrupt Rating (kAIC)		10kA
Connection (Power)		Main Breaker #12 - #20 AWG (3.31 - 67.4mm ²) Branch Breaker #14 - #2 AWG (2.5 - 6mm ²) Ground and Neutral Busbars #14 - #2 AWG (2.08 - 33.6mm ²)
Enclosure Type (Outdoor)		Powder Coated Steel
Enclosure		Hinged with Padlockable Latches
Environmental Ingress Protection (IP) Rating		NEMA 4
Operation Temperature (°C)		-40° C to +80° C
Storage Temperature (°C)		-40° C to +80° C
Dimensions (W x H x D)		9.10" x 13.87" x 6.05" [231 x 352 x 154 mm]
Weight (including 10 Breakers) lbs.		Unit: 15.9 Bracket: 2.2 System: 18.1
Surge Suppression Specifications		
Surge Protection Device (SPD) Type to UL		Strikesorb 30-A-2CHV Surge Suppression
Surge Protective Device (SPD) Type per UL 1449 4th Ed.		Recognized UL SPD
Surge Protection Device (SPD) Class to IEC 61643-11		Class I
Nominal Operating Voltage [U _n]		120V / 240V split phase
Nominal Discharge Current [I _n] per UL 1449 4th Ed.		20 kA 8/20µs
Maximum Discharge Current [I _{max}] per IEC 61643-11		60 kA 8/20µs
Impulse Discharge Current [I _{imp}] per IEC 61643-11		5kA 10/350µs
Maximum Continuous Operating Voltage [U _c] (MCOV)		150V per line
Voltage Protection Level [U _p] per IEC 61643-11		700V
Suppression Technology		MOV
Protection Modes		L1 to Neutral, L2 to Neutral
Standards Compliance & Certifications		
<i>Strikesorb modules are compliant to the following Surge Protective Device (SPD) standards:</i>		
UL 1449 4th Edition: 2011, IEC 61643-11: 2011, EN 61643-11: 2012, IEEE C62.11: 2005, IEEE C62.41: 2002, IEEE C62.45: 2002, NEMA-LS-1		
Certification		UL, VDE, CE
Panel Board Certification		UL 67 Pending (suitable for use as service equipment)

*Additional breakers and sizes are available and sold separately.

Raycap

www.raycap.com



AWG=American Wire Gauge

G02-01-730 200511

AC Disconnect with Integrated Surge Protection for Small Cell Radio Heads


RSx-DMN-X02MS-21NN • RSx-DML-X02MS-21NN] 60A Main Breaker

RSx-DMN-Z02MS-21NN • RSx-DML-Z02MS-21NN] 100A Main Breaker

Strikesorb®

The RSx-D series are AC Disconnect, Load Center and Surge Protection Devices that are Suitable for Use as Service Equipment (SUSE). They are designed to provide robust overvoltage surge protection for up to 10 AC power circuits for today's small cell radio systems.

Use (x) character in model prefix to indicate enclosure color option
D: Light Gray G: Green B: Black N: Brown L: Blue

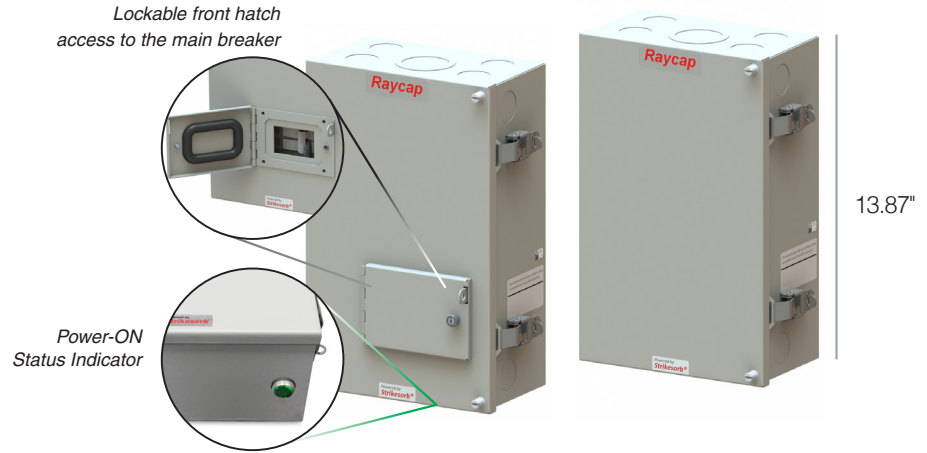

UL 67

Type 4 Enclosure Electrical Rating: 240V Single Phase
Service entrance rating: Suitable for use as service equipment
Class Interrupting Rating Symmet. Asym.



*RSD-DMN-Z02MS-21NN
(Lt. Gray color, 2 Breakers, Strikesorb SPD,
External Disconnect)*

Mounting Bracket Included

Features

- Suitable for Use as Service Equipment (SUSE) without condition per UL and NEC with 60A or 100A main breaker
- Up to ten circuits for individual power control and over current protection
- Comes standard with (2) din rail 13mm breakers providing (2) 120VAC circuits which can be bridged to provide (1) 240V feed
- 120/240VAC split phase configuration
- Available Surge Protection:
 - Optional Strikesorb 30-A-2CHV Surge Protective Device (SPD)
 - Class I SPD, certified by VDE per the IEC 61643-11 standard as suitable for installation in areas where induced lightning exposure is expected
 - Withstand direct surge currents up to 5kA (10/350µs) and induced surge currents of up to 60kA (8/20)
 - Low let through / clamping voltage - as it does not employ spark gaps or other switching elements
- Lockable front hatch access to the main breaker (Optional). Main power can be turned on and off without opening the main enclosure door. Lockout Tagout (LOTO) functionality.
- Pole mount bracket facilitates mounting on up to 4" diameter pole using existing clamps. Can also be banded to any diameter pole. Center mount holes (5/8") for center pole mount.
- Top, bottom or side cable entry allows for cleaner installations
- Customer specified knockouts available
- Patent pending design

Benefits

- Offers unique maintenance free protection
- NEMA 4 rated enclosure, allowing for installation in harsh environments
- Lightweight design allows easy installation

Raycap

www.raycap.com

Strikesorb is a registered trademark of Raycap
© 2019 Raycap All rights reserved.
G02-01-793 191101

SPECIFICATIONS

Strikesorb®

AC Disconnect with Integrated Surge Protection for Small Cell Radio Heads

RSx-DMN-X02MS-21NN • RSx-DML-X02MS-21NN] 60A Main Breaker

RSx-DMN-Z02MS-21NN • RSx-DML-Z02MS-21NN] 100A Main Breaker

Product Information

Model Number		RSx-DMN-X02MS-21NN
Number of Circuits		Available up to 10 circuits
Service Disconnect		60A main breaker
		RSx-DML-X02MS-21NN
Number of Circuits		Available up to 10 circuits
Service Disconnect		60A main breaker (with external disconnect)
		RSx-DMN-Z02MS-21NN
Number of Circuits		Available up to 10 circuits
Service Disconnect		100A main breaker
		RSx-DML-Z02MS-21NN
Number of Circuits		Available up to 10 circuits
Service Disconnect		100A main breaker (with external disconnect)
Breakers		13mm DIN Rail
Breaker Interrupt Rating (kAIC)		10kA
Connection (Power)		Main Breaker #12 - #2Ø AWG (3.31 - 67.4mm ²)
		Branch Breaker #14 - #2 AWG (2.5 - 6mm ²)
		Ground and Neutral Busbars #14 - #2 AWG (2.08 - 33.6mm ²)
Enclosure Type (Outdoor)		Powder Coated Steel
Enclosure		Hinged with Padlockable Latches
Environmental Ingress Protection (IP) Rating		NEMA 4
Operation Temperature (°C)		-40° C to +80° C
Storage Temperature (°C)		-40° C to +80° C
Dimensions (W x H x D)		9.10" x 13.87" x 6.05" [231 x 352 x 154 mm]
Weight (including 2 Breakers) lbs.		Unit: 17.8 Bracket: 2.7 System: 20.5

Surge Suppression Specifications

Surge Protection Device (SPD) Type to UL	Strikesorb 30-A-2CHV Surge Suppression
Surge Protective Device (SPD) Type per UL 1449 4th Ed.	Recognized UL SPD
Surge Protection Device (SPD) Class to IEC 61643-11	Class I
Nominal Operating Voltage [U _n]	120V / 240V split phase
Nominal Discharge Current [I _n] per UL 1449 4th Ed.	20 kA 8/20µs
Maximum Discharge Current [I _{max}] per IEC 61643-11	60 kA 8/20µs
Impulse Discharge Current [I _{imp}] per IEC 61643-11	5 kA 10/350µs
Maximum Continuous Operating Voltage [U _c] (MCOV)	150V per line
Voltage Protection Level [U _p] per IEC 61643-11	700V
Voltage Protection Rating (UL)	—
Suppression Technology	MOV
Protection Modes	L1 to Neutral, L2 to Neutral

Standards Compliance & Certifications

<i>Strikesorb modules are compliant to the following Surge Protective Device (SPD) standards:</i>	
UL 1449 4th Edition: 2011, IEC 61643-11: 2011, EN 61643-11: 2012, IEEE C62.11: 2005, IEEE C62.41: 2002, IEEE C62.45: 2002, NEMA-LS-1	
Certification	UL, VDE, CE
Panel Board Certification	UL 67 (suitable for use as service equipment)

*Additional breakers and sizes are available and sold separately.

Raycap

www.raycap.com




 AWG=American Wire Gauge

G02-01-793 191101

DATA SHEET

AC Disconnect with Integrated Surge Protection for Small Cell Radio Heads


RSx-DMN-X10MS-21NN • RSx-DML-X10MS-21NN] 60A Main Breaker

RSx-DMN-Z10MS-21NN • RSx-DML-Z10MS-21NN] 100A Main Breaker

Strikesorb®

The RSx-D series are AC Disconnect, Load Center and Surge Protection Devices that are Suitable for Use as Service Equipment (SUSE). They are designed to provide robust overvoltage surge protection for up to 10 AC power circuits for today's small cell radio systems.

Use (x) character in model prefix to indicate enclosure color option
D: Light Gray G: Green B: Black N: Brown L: Blue

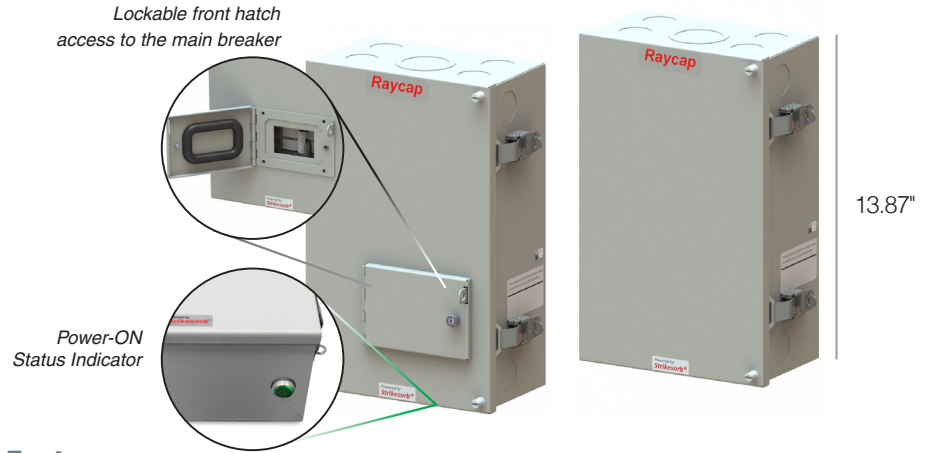


UL 67

Type 4 Enclosure
Electrical Rating: 240V Single Phase

Service entrance rating:
Suitable for use as
service equipment

Interrupting Rating
Symmet.

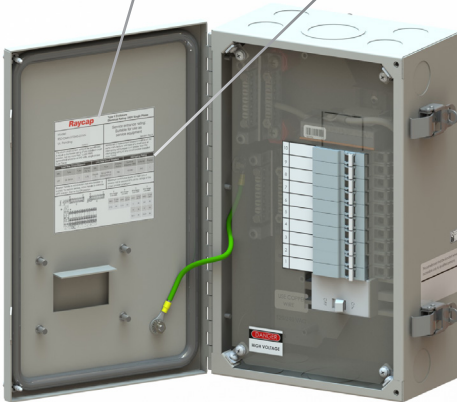

RSD-DML-Z16MS-21NN
(Lt. Gray color, 10 Breakers,
Strikesorb SPD, External Disconnect &
LED Power-ON Status Indicator)

Mounting Bracket Included

Features

- Suitable for Use as Service Equipment (SUSE) without condition per UL and NEC with 60A or 100A main breaker
- Up to ten circuits for individual power control and over current protection
- Comes standard with (10) din rail 13mm breakers providing 120VAC circuits which can be bridged to provide (5) 240V feeds
- 120/240VAC split phase configuration
- Strikesorb 30-A-2CHV Surge Protective Device (SPD)
 - Class I SPD, certified by VDE per the IEC 61643-11 standard as suitable for installation in areas where induced lightning exposure is expected
 - Withstand direct surge currents up to 5kA (10/350µs) and induced surge currents of up to 60kA (8/20)
 - Low let through / clamping voltage - as it does not employ spark gaps or other switching elements
- Lockable front hatch access to the main breaker (Optional). Main power can be turned on and off without opening the main enclosure door. Lockout Tagout (LOTO) functionality.
- LED indicator for "Power On" status and the position of the Main Breaker Disconnect (Optional)
 - 1 breaker utilized for LED indicator when this option is chosen
 - Maximum (9) 120VAC circuits, maximum (4) 240V feeds) when this option is chosen
- Pole mount bracket facilitates mounting on up to 4" diameter pole using existing clamps. Can also be banded to any diameter pole. Center mount holes (5/8") for center pole mount.
- Top, bottom or side cable entry allows for cleaner installations
- Customer specified knockouts available
- Patent pending design

Benefits

- Offers unique maintenance free protection
- NEMA 4 rated enclosure, allowing for installation in harsh environments
- Lightweight design allows easy installation

Raycap

www.raycap.com

Strikesorb is a registered trademark of Raycap
© 2019 Raycap All rights reserved.
G02-01-792 191101

SPECIFICATIONS

Strikesorb®

AC Disconnect with Integrated Surge Protection for Small Cell Radio Heads

RSx-DMN-X10MS-21NN • RSx-DML-X10MS-21NN] 60A Main Breaker

RSx-DMN-Z10MS-21NN • RSx-DML-Z10MS-21NN] 100A Main Breaker

Product Information

Model Number		RSx-DMN-X10MS-21NN
Number of Circuits		Available up to 10 circuits
Service Disconnect		60A main breaker
		RSx-DML-X10MS-21NN
Number of Circuits		Available up to 10 circuits
Service Disconnect		60A main breaker (with external disconnect & LED)
		RSx-DMN-Z10MS-21NN
Number of Circuits		Available up to 10 circuits
Service Disconnect		100A main breaker
		RSx-DML-Z10MS-21NN
Number of Circuits		Available up to 10 circuits
Service Disconnect		100A main breaker (with external disconnect & LED)
Breakers		13mm DIN Rail
Breaker Interrupt Rating (kAIC)		10kA
Connection (Power)		Main Breaker #12 - #2Ø AWG (3.31 - 67.4mm²)
		Branch Breaker #18 - #2 AWG (1.02 - 33.6mm²)
		Ground and Neutral Busbars #14 - #2 AWG (2.08 - 33.6mm²)
Enclosure Type (Outdoor)		Powder Coated Steel
Enclosure		Hinged with Padlockable Latches
Environmental Ingress Protection (IP) Rating		NEMA 4
Operation Temperature (°C)		-40° C to +80° C
Storage Temperature (°C)		-40° C to +80° C
Dimensions (W x H x D)		9.10" x 13.87" x 6.05" [231 x 352 x 154 mm]
Weight (including 16 Breakers) lbs.		Unit: 20.9 Bracket: 2.7 System: 23.6

Surge Suppression Specifications

Surge Protection Device (SPD) Type to UL	Strikesorb 30-A-2CHV Surge Suppression
Surge Protective Device (SPD) Type per UL 1449 4th Ed.	Recognized UL SPD
Surge Protection Device (SPD) Class to IEC 61643-11	Class I
Nominal Operating Voltage [U _n]	120V / 240V split phase
Nominal Discharge Current [I _n] per UL 1449 4th Ed.	20 kA 8/20µs
Maximum Discharge Current [I _{max}] per IEC 61643-11	60 kA 8/20µs
Impulse Discharge Current [I _{imp}] per IEC 61643-11	5 kA 10/350µs
Maximum Continuous Operating Voltage [U _c] (MCOV)	150V per line
Voltage Protection Level [U _p] per IEC 61643-11	700V
Suppression Technology	MOV
Protection Modes	L1 to Neutral, L2 to Neutral

Standards Compliance & Certifications

Strikesorb modules are compliant to the following Surge Protective Device (SPD) standards:

UL 1449 4th Edition: 2011, IEC 61643-11: 2011, EN 61643-11: 2012, IEEE C62.11: 2005, IEEE C62.41: 2002, IEEE C62.45: 2002, NEMA-LS-1

Certification	UL, VDE, CE
Panel Board Certification	UL 67 (suitable for use as service equipment)

*Additional breakers and sizes are available and sold separately.

Raycap

www.raycap.com




 AWG=American Wire Gauge

G02-01-792 191101


AC Disconnect with Integrated Surge Protection for Small Cell Radio Heads

RSx-EMN-X02MS-21NN • RSx-EML-X02MS-21NN 60A Main Breaker
RSx-EMN-Z02MS-21NN • RSx-EML-Z02MS-21NN 100A Main Breaker

Strikesorb®

The RSx-E series are AC Disconnect, Load Center and Surge Protection Devices that are Suitable for Use as Service Equipment (SUSE). They are designed to provide robust overvoltage surge protection for up to 12 AC power circuits for today's small cell radio systems.

Use (x) character in model prefix to indicate enclosure color option
 D: Light Gray G: Green B: Black N: Brown

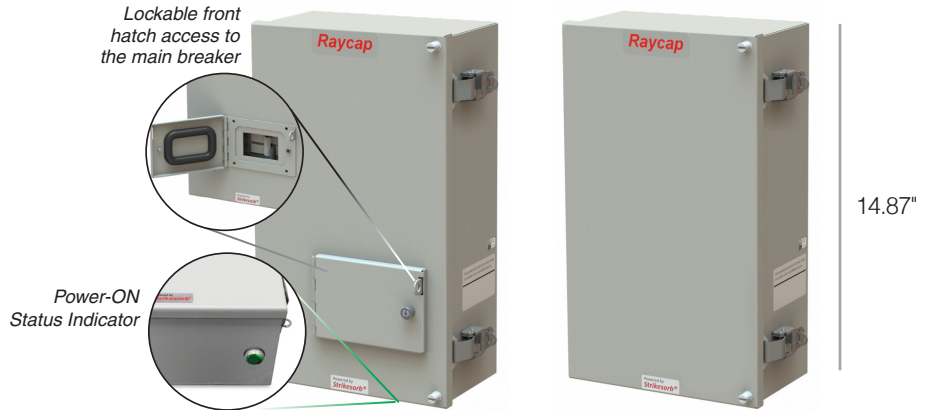

Features

- Suitable for Use as Service Equipment (SUSE) without condition per UL and NEC with 60A or 100A main breaker
- Up to twelve circuits for individual power control and over current protection
- Comes standard with (2) din rail 13mm breakers (2x20A) providing (2) 120VAC circuits which can be bridged to provide (1) 240V feed
- 120/240VAC split phase configuration
- Available Surge Protection:
 - Optional Strikesorb 30-A-2CHV Surge Protective Device (SPD)
 - Class I SPD, certified by VDE per the IEC 61643-11 standard as suitable for installation in areas where induced lightning exposure is expected
 - Withstand direct surge currents up to 5kA (10/350µs) and induced surge currents of up to 60kA (8/20)
 - Low let through / clamping voltage - as it does not employ spark gaps or other switching elements
 - Optional Raycap ProTec Din Rail Surge Protective Device (SPD)
 - Class II SPD, certified by VDE per the IEC 61643-11 standard
 - Withstand induced surge currents of up to 50kA (8/20)
 - High-Energy MOV and Thermal Protection
 - Visual status indication
- Lockable front hatch access to the main breaker (Optional). Main power can be turned on and off without opening the main enclosure door. Lockout Tagout (LOTO) functionality.
- Pole mount bracket facilitates mounting on up to 4" diameter pole using existing clamps. Can also be banded to any diameter pole. Center mount holes (5/8") for center pole mount.
- Top, bottom or side cable entry allows for cleaner installations
- Customer specified knockouts available
- Patent pending design

Benefits

- Offers unique maintenance free protection
- NEMA 4 rated enclosure, allowing for installation in harsh environments
- Lightweight design allows easy installation

UL 67

Type 4 Enclosure Electrical Rating: 240V Single Phase	
Service entrance rating: Suitable for use as service equipment	
Class	Interrupting Rating
Symmet.	Asymmet.



RSD-EMC-Z02MS-21NN
 (Lt. Gray color, 2 Breakers, Strikesorb SPD,
 External Disconnect)

Mounting Bracket Included

Raycap

www.raycap.com

Strikesorb is a registered trademark of Raycap
 © 2019 Raycap All rights reserved.
 G02-01-791 190919

SPECIFICATIONS

Strikesorb®

AC Disconnect with Integrated Surge Protection for Small Cell Radio Heads

RSx-EMN-X02MS-21NN • RSx-EML-X02MS-21NN 60A Main Breaker
RSx-EMN-Z02MS-21NN • RSx-EML-Z02MS-21NN 100A Main Breaker

Product Information

Model Number		RSx-EMN-X02MS-21NN
	Number of Circuits	Available up to 16 circuits
	Service Disconnect	60A main breaker
		RSx-EML-X02MS-21NN
	Number of Circuits	Available up to 16 circuits
	Service Disconnect	60A main breaker (with external disconnect & LED)
		RSx-EMN-Z02MS-21NN
	Number of Circuits	Available up to 16 circuits
	Service Disconnect	100A main breaker
		RSx-EML-Z02MS-21NN
	Number of Circuits	Available up to 16 circuits
	Service Disconnect	100A main breaker (with external disconnect & LED)
Breakers		13mm DIN Rail
Breakers Provided*		2x20A, 10x10A
Breaker Interrupt Rating (kAIC)		10kA
Connection (Power)		Main Breaker #12 - #20 AWG (3.31 - 67.4mm ²)
		Branch Breaker #18 - #2 AWG (1.02 - 33.6mm ²)
		Ground and Neutral Busbars #14 - #2 AWG (2.08 - 33.6mm ²)
Enclosure Type (Outdoor)		Powder Coated Steel
Enclosure		Hinged with Padlockable Latches
Environmental Ingress Protection (IP) Rating		NEMA 4
Operation Temperature (°C)		-40° C to +80° C
Storage Temperature (°C)		-40° C to +80° C
Dimensions (W x H x D)		9.10" x 14.87" x 6.05" [231 x 377 x 154 mm]
Weight (including 16 Breakers) lbs.		Unit: 14.8 Bracket: 2.3 System: 17.1

Surge Suppression Specifications

Surge Protection Device (SPD) Type to UL	Strikesorb 30-A-2CHV Surge Suppression
Surge Protective Device (SPD) Type per UL 1449 4th Ed.	Recognized UL SPD
Surge Protection Device (SPD) Class to IEC 61643-11	Class I
Nominal Operating Voltage [U _n]	120V / 240V split phase
Nominal Discharge Current [I _n] per UL 1449 4th Ed.	20 kA 8/20 μs
Maximum Discharge Current [I _{max}] per IEC 61643-11	60 kA 8/20 μs
Impulse Discharge Current [I _{imp}] per IEC 61643-11	5kA 10/350 μs
Maximum Continuous Operating Voltage [U _c] (MCOV)	150V per line
Voltage Protection Level [U _p] per IEC 61643-11	700V
Suppression Technology	MOV
Protection Modes	L1 to Neutral, L2 to Neutral

Standards Compliance & Certifications

Strikesorb modules are compliant to the following Surge Protective Device (SPD) standards:

UL 1449 4th Edition: 2011, IEC 61643-11: 2011, EN 61643-11: 2012, IEEE C62.11: 2005, IEEE C62.41: 2002, IEEE C62.45: 2002, NEMA-LS-1

Certification	UL, VDE, CE
Panel Board Certification	UL 67 (suitable for use as service equipment)

*Additional breakers and sizes are available and sold separately.

Raycap

www.raycap.com




 AWG=American Wire Gauge

G02-01-791 190919

DATA SHEET

AC Disconnect with Integrated Surge Protection for Small Cell Radio Heads

RSx-EMN-X12MS-21NN • RSx-EML-X12MS-21NN

60A Main Breaker

RSx-EMN-Z12MS-21NN • RSx-EML-Z12MS-21NN


100A Main Breaker

Strikesorb®

The RSx-E series are AC Disconnect, Load Center and Surge Protection Devices that are Suitable for Use as Service Equipment (SUSE). They are designed to provide robust overvoltage surge protection for up to 16 AC power circuits for today's small cell radio systems.

Use (x) character in model prefix to indicate enclosure color option
D: Light Gray G: Green B: Black N: Brown

Lockable front hatch
access to the main breaker

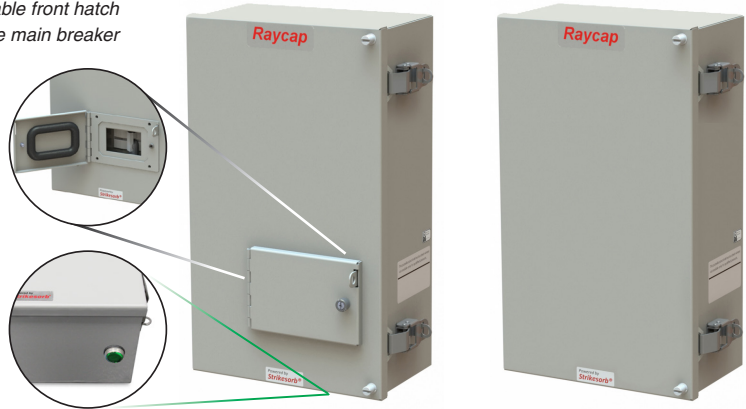

14.87"

UL 67

Type 4 Enclosure Electrical Rating: 240V Single Phase	
Service entrance rating: Suitable for use as service equipment	
Class	Interrupting Rating
Symmet.	Asym.



RSD-EMN-Z12MS-21NN
(Lt. Gray color, 12 Breakers, Strikesorb SPD,
External Disconnect)

Mounting Bracket Included

Features

- Suitable for Use as Service Equipment (SUSE) without condition per UL and NEC with 60A or 100A main breaker
- Up to sixteen circuits for individual power control and over current protection
- Comes standard with (2) din rail 13mm breakers (2x20A) providing (2) 120VAC circuits which can be bridged to provide (1) 240V feed
- 120/240VAC split phase configuration
- Available Surge Protection:
 - Optional Strikesorb 30-A-2CHV Surge Protective Device (SPD)
 - Class I SPD, certified by VDE per the IEC 61643-11 standard as suitable for installation in areas where induced lightning exposure is expected
 - Withstand direct surge currents up to 5kA (10/350µs) and induced surge currents of up to 60kA (8/20)
 - Low let through / clamping voltage - as it does not employ spark gaps or other switching elements
 - Optional Raycap ProTec Din Rail Surge Protective Device (SPD)
 - Class II SPD, certified by VDE per the IEC 61643-11 standard
 - Withstand induced surge currents of up to 50kA (8/20)
 - High-Energy MOV and Thermal Protection
 - Visual status indication
- Lockable front hatch access to the main breaker (Optional). Main power can be turned on and off without opening the main enclosure door. Lockout Tagout (LOTO) functionality.
- Pole mount bracket facilitates mounting on up to 4" diameter pole using existing clamps. Can also be banded to any diameter pole. Center mount holes (5/8") for center pole mount.
- Top, bottom or side cable entry allows for cleaner installations
- Customer specified knockouts available
- Patent pending design

Benefits

- Offers unique maintenance free protection
- NEMA 4 rated enclosure, allowing for installation in harsh environments
- Lightweight design allows easy installation

Raycap

www.raycap.com

Strikesorb is a registered trademark of Raycap
© 2019 Raycap All rights reserved.
G02-01-790 190919

SPECIFICATIONS

Strikesorb®

AC Disconnect with Integrated Surge Protection for Small Cell Radio Heads

RSx-EMN-X12MS-21NN • RSx-EML-X12MS-21NN 60A Main Breaker
RSx-EMN-Z12MS-21NN • RSx-EML-Z12MS-21NN 100A Main Breaker

Product Information

Model Number		RSx-EMN-X12MS-21NN
Number of Circuits		Available up to 16 circuits
Service Disconnect		60A main breaker
		RSx-EML-X12MS-21NN
Number of Circuits		Available up to 16 circuits
Service Disconnect		60A main breaker (with external disconnect & LED)
		RSx-EMN-Z12MS-21NN
Number of Circuits		Available up to 16 circuits
Service Disconnect		100A main breaker
		RSx-EML-Z12MS-21NN
Number of Circuits		Available up to 16 circuits
Service Disconnect		100A main breaker (with external disconnect & LED)
Breakers		13mm DIN Rail
Breakers Provided*		2x20A, 10x10A
Breaker Interrupt Rating (kAIC)		10kA
Connection (Power)		Main Breaker #12 - #20 AWG (3.31 - 67.4mm ²)
		Branch Breaker #18 - #2 AWG (1.02 - 33.6mm ²)
		Ground and Neutral Busbars #14 - #2 AWG (2.08 - 33.6mm ²)
Enclosure Type (Outdoor)		Powder Coated Steel
Enclosure		Hinged with Padlockable Latches
Environmental Ingress Protection (IP) Rating		NEMA 4
Operation Temperature (°C)		-40° C to +80° C
Storage Temperature (°C)		-40° C to +80° C
Dimensions (W x H x D)		9.10" x 14.87" x 6.05" [231 x 377 x 154 mm]
Weight (including 16 Breakers) lbs.		Unit: 17.0 Bracket: 2.3 System: 19.3

Surge Suppression Specifications

Surge Protection Device (SPD) Type to UL	Strikesorb 30-A-2CHV Surge Suppression
Surge Protective Device (SPD) Type per UL 1449 4th Ed.	Recognized UL SPD
Surge Protection Device (SPD) Class to IEC 61643-11	Class I
Nominal Operating Voltage [U _n]	120V / 240V split phase
Nominal Discharge Current [I _n] per UL 1449 4th Ed.	20 kA 8/20 μs
Maximum Discharge Current [I _{max}] per IEC 61643-11	60 kA 8/20 μs
Impulse Discharge Current [I _{imp}] per IEC 61643-11	5kA 10/350 μs
Maximum Continuous Operating Voltage [U _c] (MCOV)	150V per line
Voltage Protection Level [U _p] per IEC 61643-11	700V
Suppression Technology	MOV
Protection Modes	L1 to Neutral, L2 to Neutral

Standards Compliance & Certifications

Strikesorb modules are compliant to the following Surge Protective Device (SPD) standards:

UL 1449 4th Edition: 2011, IEC 61643-11: 2011, EN 61643-11: 2012, IEEE C62.11: 2005, IEEE C62.41: 2002, IEEE C62.45: 2002, NEMA-LS-1

Certification	UL, VDE, CE
Panel Board Certification	UL 67 (suitable for use as service equipment)

*Additional breakers and sizes are available and sold separately.

Raycap

www.raycap.com




 AWG=American Wire Gauge

G02-01-790 190919

DATA SHEET

Strikesorb®

The RSx-E series are AC Disconnect, Load Center and Surge Protection Devices that are Suitable for Use as Service Equipment (SUSE). They are designed to provide robust overvoltage surge protection for up to 12 AC power circuits for today's small cell radio systems.

AC Disconnect with Integrated Surge Protection for Small Cell Radio Heads

RSx-EMN-X12MS-21NN] 60A Main Breaker
RSx-EMC-X12MS-21NN]

RSx-EMN-Z12MS-21NN] 100A Main Breaker
RSx-EMC-Z12MS-21NN]

Use (x) character in model prefix to indicate enclosure color option
D: Light Gray G: Green B: Black N: Brown L: Blue



UL 67

Type 4 Enclosure Electrical Rating: 240V Single Phase	
Service entrance rating: Suitable for use as service equipment	
Class	Interrupting Rating
Symmet.	Asymmet.



RSD-EMC-Z12MS-21NN

(Lt. Gray color, 12 Breakers, Strikesorb SPD,
External Disconnect)

Mounting Bracket Included

Features

- Suitable for Use as Service Equipment (SUSE) without condition per UL and NEC with 60A or 100A main breaker
- Up to twelve circuits for individual power control and over current protection
- Comes standard with 12x 1-Pos, 6x 2-Pos or other combination of din-rail breakers (2A to 25A)
- 120/240VAC split phase configuration
- Available Surge Protection:
 - Strikesorb 30-A-2CHV Surge Protective Device (SPD)
 - Class I SPD, certified by VDE per the IEC 61643-11 standard as suitable for installation in areas where induced lightning exposure is expected
 - Withstand direct surge currents up to 5kA (10/350µs) and induced surge currents of up to 60kA (8/20)
 - Low let through / clamping voltage - as it does not employ spark gaps or other switching elements
- Lockable front hatch access to the main breaker (Optional). Main power can be turned on and off without opening the main enclosure door. Lockout Tagout (LOTO) functionality.
- Pole mount bracket facilitates mounting on up to 4" diameter pole using existing clamps. Can also be banded to any diameter pole. Center mount holes (5/8") for center pole mount.
- Top, bottom or side cable entry allows for cleaner installations
- Customer specified knockouts available
- Patent pending design

Benefits

- Offers unique maintenance free protection
- NEMA 4 rated enclosure, allowing for installation in harsh environments
- Lightweight design allows easy installation

Raycap

www.raycap.com

Strikesorb is a registered trademark of Raycap
© 2020 Raycap All rights reserved.
G02-01-731 200511

SPECIFICATIONS

Strikesorb®

AC Disconnect with Integrated Surge Protection for Small Cell Radio Heads

RSx-EMN-X12MS-21NN] 60A Main Breaker
RSx-EMC-X12MS-21NN
RSx-EMN-Z12MS-21NN] 100A Main Breaker
RSx-EMC-Z12MS-21NN

Product Information		Strikesorb SPD Models
Model Number		RSx-EMN-X12MS-21NN
	Number of Circuits	Available up to 12 circuits
	Service Disconnect	60A main breaker
		RSx-EMC-X12MS-21NN
	Number of Circuits	Available up to 12 circuits
	Service Disconnect	60A main breaker (with external disconnect)
		RSx-EMN-Z12MS-21NN
	Number of Circuits	Available up to 12 circuits
	Service Disconnect	100A main breaker
		RSx-EMC-Z12MS-21NN
	Number of Circuits	Available up to 12 circuits
	Service Disconnect	100A main breaker (with external disconnect)
Breakers		13mm DIN Rail
Breakers Provided*		12x 1-Pos, 6x 2-Pos or other combination (2A to 25A)
Breaker Interrupt Rating (kAIC)		10kA
Connection (Power)		Main Breaker #12 - #20 AWG (3.31 - 67.4mm ²)
		Branch Breaker #14 - #2 AWG (2.5 - 6mm ²)
		Ground and Neutral Busbars #14 - #2 AWG (2.08 - 33.6mm ²)
Enclosure Type (Outdoor)		Powder Coated Steel
Enclosure		Hinged with Padlockable Latches
Environmental Ingress Protection (IP) Rating		NEMA 4
Operation Temperature (°C)		-40° C to +80° C
Storage Temperature (°C)		-40° C to +80° C
Dimensions (W x H x D)		9.10" x 14.87" x 6.05" [231 x 377 x 154 mm]
Weight (including 12 Breakers) lbs.		Unit: 17.0 Bracket: 2.3 System: 19.3
Surge Suppression Specifications		
Surge Protection Device (SPD) Type to UL		Strikesorb 30-A-2CHV Surge Suppression
Surge Protective Device (SPD) Type per UL 1449 4th Ed.		Recognized UL SPD
Surge Protection Device (SPD) Class to IEC 61643-11		Class I
Nominal Operating Voltage [U _n]		120V / 240V split phase
Nominal Discharge Current [I _n] per UL 1449 4th Ed.		20 kA 8/20µs
Maximum Discharge Current [I _{max}] per IEC 61643-11		60 kA 8/20µs
Impulse Discharge Current [I _{imp}] per IEC 61643-11		5kA 10/350µs
Maximum Continuous Operating Voltage [U _c] (MCOV)		150V per line
Voltage Protection Level [U _p] per IEC 61643-11		700V
Suppression Technology		MOV
Protection Modes		L1 to Neutral, L2 to Neutral
Standards Compliance & Certifications		
<i>Strikesorb modules are compliant to the following Surge Protective Device (SPD) standards:</i>		
UL 1449 4th Edition: 2011, IEC 61643-11: 2011, EN 61643-11: 2012, IEEE C62.11: 2005, IEEE C62.41: 2002, IEEE C62.45: 2002, NEMA-LS-1		
Certification		UL, VDE, CE
Panel Board Certification		UL 67 Pending (suitable for use as service equipment)

*Additional breakers and sizes are available and sold separately.

Raycap

www.raycap.com



AWG=American Wire Gauge

G02-01-731 200511

DATA SHEET

Strikesorb®


The RSx-E series are AC Disconnect, Load Center and Surge Protection Devices that are Suitable for Use as Service Equipment (SUSE). They are designed to provide robust overvoltage surge protection for up to 12 AC power circuits for today's small cell radio systems.

AC Disconnect with Integrated Surge Protection for Small Cell Radio Heads

RSx-EMN-X02MS-21NN] 60A Main Breaker
RSx-EMC-X02MS-21NN]

RSx-EMN-Z02MS-21NN] 100A Main Breaker
RSx-EMC-Z02MS-21NN]

Use (x) character in model prefix to indicate enclosure color option
D: Light Gray G: Green B: Black N: Brown L: Blue

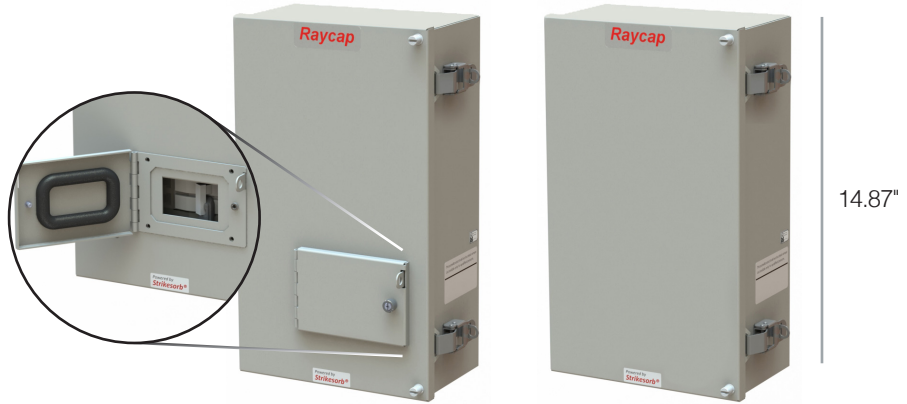

UL 67

Type 4 Enclosure
Electrical Rating: 240V Single Phase

Service entrance rating:
Suitable for use as
service equipment



RSD-EMC-Z02MS-21NN
(Lt. Gray color, 2 Breakers, Strikesorb SPD,
External Disconnect)

Mounting Bracket Included

Features

- Suitable for Use as Service Equipment (SUSE) without condition per UL and NEC with 60A or 100A main breaker
- Up to twelve circuits for individual power control and over current protection
- Comes standard with 2x 1-Pos or 1x 2-Pos din-rail breakers (2A to 25A)
- 120/240VAC split phase configuration
- Available Surge Protection:
 - Strikesorb 30-A-2CHV Surge Protective Device (SPD)
 - Class I SPD, certified by VDE per the IEC 61643-11 standard as suitable for installation in areas where induced lightning exposure is expected
 - Withstand direct surge currents up to 5kA (10/350µs) and induced surge currents of up to 60kA (8/20)
 - Low let through / clamping voltage - as it does not employ spark gaps or other switching elements
- Lockable front hatch access to the main breaker (Optional). Main power can be turned on and off without opening the main enclosure door. Lockout Tagout (LOTO) functionality.
- Pole mount bracket facilitates mounting on up to 4" diameter pole using existing clamps. Can also be banded to any diameter pole. Center mount holes (5/8") for center pole mount.
- Top, bottom or side cable entry allows for cleaner installations
- Customer specified knockouts available
- Patent pending design

Benefits

- Offers unique maintenance free protection
- NEMA 4 rated enclosure, allowing for installation in harsh environments
- Lightweight design allows easy installation

Raycap

www.raycap.com

Strikesorb is a registered trademark of Raycap
© 2020 Raycap All rights reserved.
G02-01-740 200511

SPECIFICATIONS

Strikesorb®

AC Disconnect with Integrated Surge Protection for Small Cell Radio Heads

RSx-EMN-X02MS-21NN] 60A Main Breaker
RSx-EMC-X02MS-21NN]
RSx-EMN-Z02MS-21NN] 100A Main Breaker
RSx-EMC-Z02MS-21NN]

Product Information		Strikesorb SPD Models
Model Number		RSx-EMN-X02MS-21NN
	Number of Circuits	Available up to 12 circuits
	Service Disconnect	60A main breaker
		RSx-EMC-X02MS-21NN
	Number of Circuits	Available up to 12 circuits
	Service Disconnect	60A main breaker (with external disconnect)
		RSx-EMN-Z02MS-21NN
	Number of Circuits	Available up to 12 circuits
	Service Disconnect	100A main breaker
		RSx-EMC-Z02MS-21NN
	Number of Circuits	Available up to 12 circuits
	Service Disconnect	100A main breaker (with external disconnect)
Breakers		13mm DIN Rail
Breakers Provided*		2x 1-Pos or 1x 2-Pos din-rail breakers (2A to 25A)
Breaker Interrupt Rating (kAIC)		10kA
Connection (Power)		Main Breaker #12 - #20 AWG (3.31 - 67.4mm ²)
		Branch Breaker #14 - #2 AWG (2.5 - 6mm ²)
		Ground and Neutral Busbars #14 - #2 AWG (2.08 - 33.6mm ²)
Enclosure Type (Outdoor)		Powder Coated Steel
Enclosure		Hinged with Padlockable Latches
Environmental Ingress Protection (IP) Rating		NEMA 4
Operation Temperature (°C)		-40° C to +80° C
Storage Temperature (°C)		-40° C to +80° C
Dimensions (W x H x D)		9.10" x 14.87" x 6.05" [231 x 377 x 154 mm]
Weight (including 2 Breakers) lbs.		Unit: 14.8 Bracket: 2.3 System: 17.1
Surge Suppression Specifications		
Surge Protection Device (SPD) Type to UL		Strikesorb 30-A-2CHV Surge Suppression
Surge Protective Device (SPD) Type per UL 1449 4th Ed.		Recognized UL SPD
Surge Protection Device (SPD) Class to IEC 61643-11		Class I
Nominal Operating Voltage [U _n]		120V / 240V split phase
Nominal Discharge Current [I _n] per UL 1449 4th Ed.		20 kA 8/20µs
Maximum Discharge Current [I _{max}] per IEC 61643-11		60 kA 8/20µs
Impulse Discharge Current [I _{imp}] per IEC 61643-11		5kA 10/350µs
Maximum Continuous Operating Voltage [U _c] (MCOV)		150V per line
Voltage Protection Level [U _p] per IEC 61643-11		700V
Suppression Technology		MOV
Protection Modes		L1 to Neutral, L2 to Neutral
Standards Compliance & Certifications		
<i>Strikesorb modules are compliant to the following Surge Protective Device (SPD) standards:</i>		
UL 1449 4th Edition: 2011, IEC 61643-11: 2011, EN 61643-11: 2012, IEEE C62.11: 2005, IEEE C62.41: 2002, IEEE C62.45: 2002, NEMA-LS-1		
Certification		UL, VDE, CE
Panel Board Certification		UL 67 Pending (suitable for use as service equipment)

*Additional breakers and sizes are available and sold separately.

Raycap

www.raycap.com



AWG=American Wire Gauge

G02-01-740 200511

DATA SHEET

AC Disconnect with Integrated Surge Protection for Small Cell Radio Heads

Strikesorb®

The RSx-F series are AC Disconnect, Load Center and Surge Protection Devices that are Suitable for Use as Service Equipment (SUSE). They are designed to provide robust overvoltage surge protection for up to 16 AC power circuits for today's small cell radio systems.


RSx-FMN-X02MS-21NN • RSx-FML-X02MS-21NN

60A Main Breaker

RSx-FMN-Z02MS-21NN • RSx-FML-Z02MS-21NN

100A Main Breaker

Use (x) character in model prefix to indicate enclosure color option
D: Light Gray G: Green B: Black N: Brown

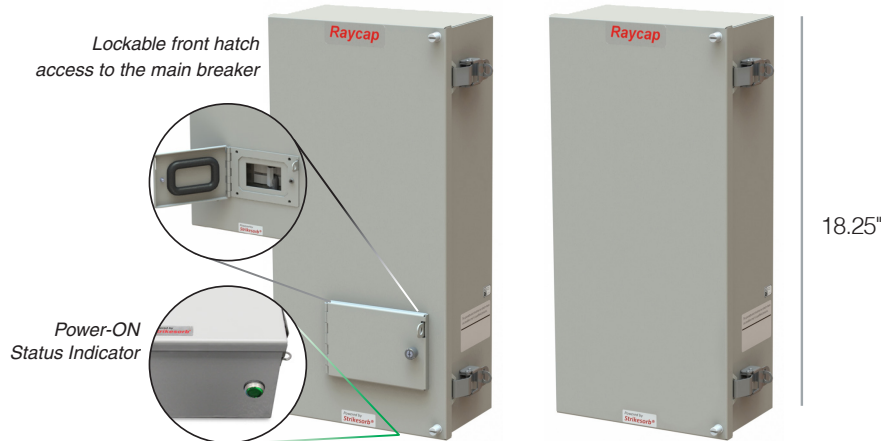

Features

- Suitable for Use as Service Equipment (SUSE) without condition per UL and NEC with 60A or 100A main breaker
- Up to sixteen circuits for individual power control and over current protection
- Comes standard with (2) din rail 13mm breakers (2x20A) providing (2) 120VAC circuits which can be bridged to provide (1) 240V feed
- 120/240VAC split phase configuration
- Available Surge Protection:
 - Optional Strikesorb 30-A-2CHV Surge Protective Device (SPD)
 - Class I SPD, certified by VDE per the IEC 61643-11 standard as suitable for installation in areas where induced lightning exposure is expected
 - Withstand direct surge currents up to 5kA (10/350µs) and induced surge currents of up to 60kA (8/20)
 - Low let through / clamping voltage - as it does not employ spark gaps or other switching elements
 - Optional Raycap ProTec Din Rail Surge Protective Device (SPD)
 - Class II SPD, certified by VDE per the IEC 61643-11 standard
 - Withstand induced surge currents of up to 50kA (8/20)
 - High-Energy MOV and Thermal Protection
 - Visual status indication
- Lockable front hatch access to the main breaker (Optional). Main power can be turned on and off without opening the main enclosure door. Lockout Tagout (LOTO) functionality.
- Pole mount bracket facilitates mounting on up to 4" diameter pole using existing clamps. Can also be banded to any diameter pole. Center mount holes (5/8") for center pole mount.
- Top, bottom or side cable entry allows for cleaner installations
- Customer specified knockouts available
- Patent pending design

Benefits

- Offers unique maintenance free protection
- NEMA 4 rated enclosure, allowing for installation in harsh environments
- Lightweight design allows easy installation

UL 67

Type 4 Enclosure Electrical Rating: 240V Single Phase	
Service entrance rating: Suitable for use as service equipment	
Class	Interrupting Rating
Symmet.	Asym.



RSD-FMC-Z02MS-21NN
(Lt. Gray color, 2 Breakers, Strikesorb SPD,
External Disconnect)

Mounting Bracket Included

Raycap

www.raycap.com

Strikesorb is a registered trademark of Raycap
© 2019 Raycap All rights reserved.
G02-01-789 190919

SPECIFICATIONS

Strikesorb®

AC Disconnect with Integrated Surge Protection for Small Cell Radio Heads

RSx-FMN-X16MS-21NN • RSx-FML-X16MS-21NN] 60A Main Breaker

RSx-FMN-Z16MS-21NN • RSx-FML-Z16MS-21NN] 100A Main Breaker

Product Information

Model Number		RSx-FMN-X02MS-21NN
Number of Circuits		Available up to 16 circuits
Service Disconnect		60A main breaker
		RSx-FML-X02MS-21NN
Number of Circuits		Available up to 16 circuits
Service Disconnect		60A main breaker (with external disconnect & LED)
		RSx-FMN-Z02MS-21NN
Number of Circuits		Available up to 16 circuits
Service Disconnect		100A main breaker
		RSx-FML-Z02MS-21NN
Number of Circuits		Available up to 16 circuits
Service Disconnect		100A main breaker (with external disconnect & LED)
Breakers		13mm DIN Rail
Breaker Interrupt Rating (kAIC)		10kA
Connection (Power)		Main Breaker #12 - #2Ø AWG (3.31 - 67.4mm²)
		Branch Breaker #18 - #2 AWG (1.02 - 33.6mm²)
		Ground and Neutral Busbars #14 - #2 AWG (2.08 - 33.6mm²)
Enclosure Type (Outdoor)		Powder Coated Steel
Enclosure		Hinged with Padlockable Latches
Environmental Ingress Protection (IP) Rating		NEMA 4
Operation Temperature (°C)		-40° C to +80° C
Storage Temperature (°C)		-40° C to +80° C
Dimensions (W x H x D)		9.10" x 18.25" x 6.05" [231 x 464 x 154 mm]
Weight (including 16 Breakers) lbs.		Unit: 20.9 Bracket: 2.7 System: 23.6

Surge Suppression Specifications

Surge Protection Device (SPD) Type to UL	Strikesorb 30-A-2CHV Surge Suppression
Surge Protective Device (SPD) Type per UL 1449 4th Ed.	Recognized UL SPD
Surge Protection Device (SPD) Class to IEC 61643-11	Class I
Nominal Operating Voltage [U _n]	120V / 240V split phase
Nominal Discharge Current [I _n] per UL 1449 4th Ed.	20 kA 8/20µs
Maximum Discharge Current [I _{max}] per IEC 61643-11	60 kA 8/20µs
Impulse Discharge Current [I _{imp}] per IEC 61643-11	5 kA 10/350µs
Maximum Continuous Operating Voltage [U _c] (MCOV)	150V per line
Voltage Protection Level [U _p] per IEC 61643-11	700V
Suppression Technology	MOV
Protection Modes	L1 to Neutral, L2 to Neutral

Standards Compliance & Certifications

Strikesorb modules are compliant to the following Surge Protective Device (SPD) standards:

UL 1449 4th Edition: 2011, IEC 61643-11: 2011, EN 61643-11: 2012, IEEE C62.11: 2005, IEEE C62.41: 2002, IEEE C62.45: 2002, NEMA-LS-1

Certification	UL, VDE, CE
Panel Board Certification	UL 67 (suitable for use as service equipment)

**Additional breakers and sizes are available and sold separately.*

Raycap

www.raycap.com




 AWG=American Wire Gauge

G02-01-789 190919

AC Disconnect with Integrated Surge Protection for Small Cell Radio Heads


RSx-FMN-X16MS-21NN • RSx-FML-X16MS-21NN] 60A Main Breaker

RSx-FMN-Z16MS-21NN • RSx-FML-Z16MS-21NN] 100A Main Breaker

Strikesorb®

The RSx-F series are AC Disconnect, Load Center and Surge Protection Devices that are Suitable for Use as Service Equipment (SUSE). They are designed to provide robust overvoltage surge protection for up to 16 AC power circuits for today's small cell radio systems.

Use (x) character in model prefix to indicate enclosure color option
D: Light Gray G: Green B: Black N: Brown L: Blue

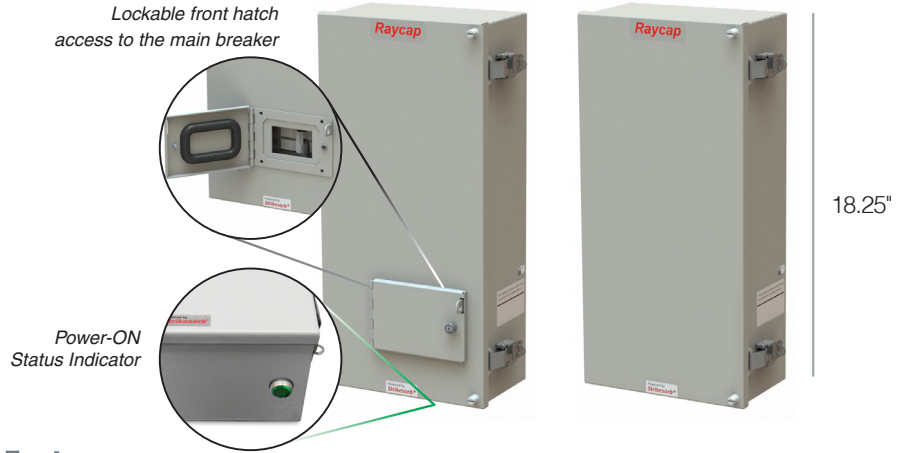

Features

- Suitable for Use as Service Equipment (SUSE) without condition per UL and NEC with 60A or 100A main breaker
- Up to sixteen circuits for individual power control and over current protection
- Comes standard with (16) din rail 13mm breakers providing 120VAC circuits which can be bridged to provide (8) 240V feeds (1 breaker utilized for LED indicator when this option is chosen)
- 120/240VAC split phase configuration
- Strikesorb 30-A-2CHV Surge Protective Device (SPD)
 - Class I SPD, certified by VDE per the IEC 61643-11 standard as suitable for installation in areas where induced lightning exposure is expected
 - Withstand direct surge currents up to 5kA (10/350µs) and induced surge currents of up to 60kA (8/20)
 - Low let through / clamping voltage - as it does not employ spark gaps or other switching elements
- Lockable front hatch access to the main breaker (Optional). Main power can be turned on and off without opening the main enclosure door. Lockout Tagout (LOTO) functionality.
- LED indicator for "Power On" status and the position of the Main Breaker Disconnect (Optional)
 - 1 breaker utilized for LED indicator when this option is chosen
 - Maximum (15) 120VAC circuits, maximum (7) 240V feeds when this option is chosen
- Pole mount bracket facilitates mounting on up to 4" diameter pole using existing clamps. Can also be banded to any diameter pole. Center mount holes (5/8") for center pole mount.
- Top, bottom or side cable entry allows for cleaner installations
- Customer specified knockouts available
- Patent pending design

Benefits

- Offers unique maintenance free protection
- NEMA 4 rated enclosure, allowing for installation in harsh environments
- Lightweight design allows easy installation

UL 67

Type 4 Enclosure
Electrical Rating: 240V Single Phase

Service entrance rating:
Suitable for use as
service equipment

Class: Interrupting Rating
Symmet: Yes



RSD-FML-Z16MS-21NN
(Lt. Gray color, 16 Breakers,
Strikesorb SPD, External Disconnect &
LED Power-ON Status Indicator)

Mounting Bracket Included

Raycap

www.raycap.com

Strikesorb is a registered trademark of Raycap
© 2019 Raycap All rights reserved.
G02-01-788 190920

SPECIFICATIONS

Strikesorb®

AC Disconnect with Integrated Surge Protection for Small Cell Radio Heads

RSx-FMN-X16MS-21NN • RSx-FML-X16MS-21NN] 60A Main Breaker

RSx-FMN-Z16MS-21NN • RSx-FML-Z16MS-21NN] 100A Main Breaker

Product Information

Model Number		RSx-FMN-X16MS-21NN
Number of Circuits		Available up to 16 circuits
Service Disconnect		60A main breaker
		RSx-FML-X16MS-21NN
Number of Circuits		Available up to 16 circuits
Service Disconnect		60A main breaker (with external disconnect & LED)
		RSx-FMN-Z16MS-21NN
Number of Circuits		Available up to 16 circuits
Service Disconnect		100A main breaker
		RSx-FML-Z16MS-21NN
Number of Circuits		Available up to 16 circuits
Service Disconnect		100A main breaker (with external disconnect & LED)
Breakers		13mm DIN Rail
Breaker Interrupt Rating (kAIC)		10kA
Connection (Power)		Main Breaker #12 - #2Ø AWG (3.31 - 67.4mm²)
		Branch Breaker #18 - #2 AWG (1.02 - 33.6mm²)
		Ground and Neutral Busbars #14 - #2 AWG (2.08 - 33.6mm²)
Enclosure Type (Outdoor)		Powder Coated Steel
Enclosure		Hinged with Padlockable Latches
Environmental Ingress Protection (IP) Rating		NEMA 4
Operation Temperature (°C)		-40° C to +80° C
Storage Temperature (°C)		-40° C to +80° C
Dimensions (W x H x D)		9.10" x 18.25" x 6.05" [231 x 464 x 154 mm]
Weight (including 16 Breakers) lbs.		Unit: 20.9 Bracket: 2.7 System: 23.6

Surge Suppression Specifications

Surge Protection Device (SPD) Type to UL	Strikesorb 30-A-2CHV Surge Suppression
Surge Protective Device (SPD) Type per UL 1449 4th Ed.	Recognized UL SPD
Surge Protection Device (SPD) Class to IEC 61643-11	Class I
Nominal Operating Voltage [U _n]	120V / 240V split phase
Nominal Discharge Current [I _n] per UL 1449 4th Ed.	20 kA 8/20µs
Maximum Discharge Current [I _{max}] per IEC 61643-11	60 kA 8/20µs
Impulse Discharge Current [I _{imp}] per IEC 61643-11	5 kA 10/350µs
Maximum Continuous Operating Voltage [U _c] (MCOV)	150V per line
Voltage Protection Level [U _p] per IEC 61643-11	700V
Suppression Technology	MOV
Protection Modes	L1 to Neutral, L2 to Neutral

Standards Compliance & Certifications

<i>Strikesorb modules are compliant to the following Surge Protective Device (SPD) standards:</i>	
UL 1449 4th Edition: 2011, IEC 61643-11: 2011, EN 61643-11: 2012, IEEE C62.11: 2005, IEEE C62.41: 2002, IEEE C62.45: 2002, NEMA-LS-1	
Certification	UL, VDE, CE
Panel Board Certification	UL 67 (suitable for use as service equipment)

*Additional breakers and sizes are available and sold separately.

Raycap

www.raycap.com




 AWG=American Wire Gauge

G02-01-788 190920

DATA SHEET

Strikesorb®

The RSx-F series are AC Disconnect, Load Center and Surge Protection Devices that are Suitable for Use as Service Equipment (SUSE). They are designed to provide robust overvoltage surge protection for up to 16 AC power circuits for today's small cell radio systems.

AC Disconnect with Integrated Surge Protection for Small Cell Radio Heads

RSx-FMN-X16MS-21NN] 60A Main Breaker
RSx-FMC-X16MS-21NN]

RSx-FMN-Z16MS-21NN] 100A Main Breaker
RSx-FMC-Z16MS-21NN]

Use (x) character in model prefix to indicate enclosure color option
D: Light Gray G: Green B: Black N: Brown L: Blue



UL 67

Type 4 Enclosure Electrical Rating: 240V Single Phase	
Service entrance rating: Suitable for use as service equipment	
Class	Interrupting Rating
Symmet.	Asym.



RSD-FMC-Z16MS-21NN
(Lt. Gray color, 16 Breakers, Strikesorb SPD,
External Disconnect)

Mounting Bracket Included

Features

- Suitable for Use as Service Equipment (SUSE) without condition per UL and NEC with 60A or 100A main breaker
- Up to sixteen circuits for individual power control and over current protection
- Comes standard with 16x 1-Pos, 8x 2-Pos or other combination of din-rail breakers (2A to 25A)
- 120/240VAC split phase configuration
- Available Surge Protection:
 - Strikesorb 30-A-2CHV Surge Protective Device (SPD)
 - Class I SPD, certified by VDE per the IEC 61643-11 standard as suitable for installation in areas where induced lightning exposure is expected
 - Withstand direct surge currents up to 5kA (10/350µs) and induced surge currents of up to 60kA (8/20)
 - Low let through / clamping voltage - as it does not employ spark gaps or other switching elements
- Lockable front hatch access to the main breaker (Optional). Main power can be turned on and off without opening the main enclosure door. Lockout Tagout (LOTO) functionality.
- Pole mount bracket facilitates mounting on up to 4" diameter pole using existing clamps. Can also be banded to any diameter pole. Center mount holes (5/8") for center pole mount.
- Top, bottom or side cable entry allows for cleaner installations
- Customer specified knockouts available
- Patent pending design

Benefits

- Offers unique maintenance free protection
- NEMA 4 rated enclosure, allowing for installation in harsh environments
- Lightweight design allows easy installation

Raycap

www.raycap.com

Strikesorb is a registered trademark of Raycap
© 2020 Raycap All rights reserved.
G02-01-732 200511

SPECIFICATIONS

Strikesorb®

AC Disconnect with Integrated Surge Protection for Small Cell Radio Heads

RSx-FMN-X16MS-21NN
RSx-FMC-X16MS-21NN] 60A Main Breaker

RSx-FMN-Z16MS-21NN
RSx-FMC-Z16MS-21NN] 100A Main Breaker

Product Information

Strikesorb SPD Models

Model Number		RSx-FMN-X16MS-21NN
	Number of Circuits	Available up to 16 circuits
	Service Disconnect	60A main breaker
		RSx-FMC-X16MS-21NN
	Number of Circuits	Available up to 16 circuits
	Service Disconnect	60A main breaker (with external disconnect)
		RSx-FMN-Z16MS-21NN
	Number of Circuits	Available up to 16 circuits
	Service Disconnect	100A main breaker
		RSx-FMC-Z16MS-21NN
	Number of Circuits	Available up to 16 circuits
	Service Disconnect	100A main breaker (with external disconnect)
Breakers		13mm DIN Rail
Breakers Provided*		16x 1-Pos, 8x 2-Pos or other combination (2A to 25A)
Breaker Interrupt Rating (kAIC)		10kA
Connection (Power)		Main Breaker #12 - #20 AWG (3.31 - 67.4mm ²)
		Branch Breaker #14 - #2 AWG (2.5 - 6mm ²)
		Ground and Neutral Busbars #14 - #2 AWG (2.08 - 33.6mm ²)
Enclosure Type (Outdoor)		Powder Coated Steel
Enclosure		Hinged with Padlockable Latches
Environmental Ingress Protection (IP) Rating		NEMA 4
Operation Temperature (°C)		-40° C to +80° C
Storage Temperature (°C)		-40° C to +80° C
Dimensions (W x H x D)		9.10" x 18.25" x 6.05" [231 x 464 x 154 mm]
Weight (including 16 Breakers) lbs.		Unit: 20.9 Bracket: 2.7 System: 23.6

Surge Suppression Specifications

Surge Protection Device (SPD) Type to UL	Strikesorb 30-A-2CHV Surge Suppression
Surge Protective Device (SPD) Type per UL 1449 4th Ed.	Recognized UL SPD
Surge Protection Device (SPD) Class to IEC 61643-11	Class I
Nominal Operating Voltage [U _n]	120V / 240V split phase
Nominal Discharge Current [I _n] per UL 1449 4th Ed.	20 kA 8/20 μs
Maximum Discharge Current [I _{max}] per IEC 61643-11	60 kA 8/20 μs
Impulse Discharge Current [I _{imp}] per IEC 61643-11	5 kA 10/350 μs
Maximum Continuous Operating Voltage [U _c] (MCOV)	150V per line
Voltage Protection Level [U _p] per IEC 61643-11	700V
Suppression Technology	MOV
Protection Modes	L1 to Neutral, L2 to Neutral

Standards Compliance & Certifications

Strikesorb modules are compliant to the following Surge Protective Device (SPD) standards:

UL 1449 4th Edition: 2011, IEC 61643-11: 2011, EN 61643-11: 2012, IEEE C62.11: 2005, IEEE C62.41: 2002, IEEE C62.45: 2002, NEMA-LS-1

Certification	UL, VDE, CE
Panel Board Certification	UL 67 (suitable for use as service equipment)

*Additional breakers and sizes are available and sold separately.

Raycap

www.raycap.com



AWG=American Wire Gauge

G02-01-732 200511

DATA SHEET

Strikesorb®

The RSx-F series are AC Disconnect, Load Center and Surge Protection Devices that are Suitable for Use as Service Equipment (SUSE). They are designed to provide robust overvoltage surge protection for up to 16 AC power circuits for today's small cell radio systems.

AC Disconnect with Integrated Surge Protection for Small Cell Radio Heads

RSx-FMN-X02MS-21NN
RSx-FMC-X02MS-21NN] 60A Main Breaker

RSx-FMN-Z02MS-21NN
RSx-FMC-Z02MS-21NN] 100A Main Breaker

Use (x) character in model prefix to indicate enclosure color option
D: Light Gray G: Green B: Black N: Brown L: Blue



UL 67

Type 4 Enclosure Electrical Rating: 240V Single Phase	
Service entrance rating: Suitable for use as service equipment	
Class	Interrupting Rating
Symmet.	Asym.



*RSD-FMC-Z02MS-21NN
(Lt. Gray color, 2 Breakers, Strikesorb SPD,
External Disconnect)*

Mounting Bracket Included

Features

- Suitable for Use as Service Equipment (SUSE) without condition per UL and NEC with 60A or 100A main breaker
- Up to sixteen circuits for individual power control and over current protection
- Comes standard with 2x 1-Pos or 1x 2-Pos din-rail breakers (2A to 25A)
- 120/240VAC split phase configuration
- Available Surge Protection:
 - Strikesorb 30-A-2CHV Surge Protective Device (SPD)
 - Class I SPD, certified by VDE per the IEC 61643-11 standard as suitable for installation in areas where induced lightning exposure is expected
 - Withstand direct surge currents up to 5kA (10/350µs) and induced surge currents of up to 60kA (8/20)
 - Low let through / clamping voltage - as it does not employ spark gaps or other switching elements
- Lockable front hatch access to the main breaker (Optional). Main power can be turned on and off without opening the main enclosure door. Lockout Tagout (LOTO) functionality.
- Pole mount bracket facilitates mounting on up to 4" diameter pole using existing clamps. Can also be banded to any diameter pole. Center mount holes (5/8") for center pole mount.
- Top, bottom or side cable entry allows for cleaner installations
- Customer specified knockouts available
- Patent pending design

Benefits

- Offers unique maintenance free protection
- NEMA 4 rated enclosure, allowing for installation in harsh environments
- Lightweight design allows easy installation

Raycap

www.raycap.com

Strikesorb is a registered trademark of Raycap
© 2020 Raycap All rights reserved.
G02-01-741 200511

SPECIFICATIONS

Strikesorb®

AC Disconnect with Integrated Surge Protection for Small Cell Radio Heads

RSx-FMN-X02MS-21NN] 60A Main Breaker
RSx-FMC-X02MS-21NN
RSx-FMN-Z02MS-21NN] 100A Main Breaker
RSx-FMC-Z02MS-21NN

Product Information

Strikesorb SPD Models

Model Number		RSx-FMN-X02MS-21NN
	Number of Circuits	Available up to 16 circuits
	Service Disconnect	60A main breaker
		RSx-FMC-X02MS-21NN
	Number of Circuits	Available up to 16 circuits
	Service Disconnect	60A main breaker (with external disconnect)
		RSx-FMN-Z02MS-21NN
	Number of Circuits	Available up to 16 circuits
	Service Disconnect	100A main breaker
		RSx-FMC-Z02MS-21NN
	Number of Circuits	Available up to 16 circuits
	Service Disconnect	100A main breaker (with external disconnect)
Breakers		13mm DIN Rail
Breakers Provided*		2x 1-Pos or 1x 2-Pos din-rail breakers (2A to 25A)
Breaker Interrupt Rating (kAIC)		10kA
Connection (Power)		Main Breaker #12 - #20 AWG (3.31 - 67.4mm ²)
		Branch Breaker #14 - #2 AWG (2.5 - 6mm ²)
		Ground and Neutral Busbars #14 - #2 AWG (2.08 - 33.6mm ²)
Enclosure Type (Outdoor)		Powder Coated Steel
Enclosure		Hinged with Padlockable Latches
Environmental Ingress Protection (IP) Rating		NEMA 4
Operation Temperature (°C)		-40° C to +80° C
Storage Temperature (°C)		-40° C to +80° C
Dimensions (W x H x D)		9.10" x 18.25" x 6.05" [231 x 464 x 154 mm]
Weight (including 2 Breakers) lbs.		Unit:17.8 Bracket: 2.7 System: 20.5

Surge Suppression Specifications

Surge Protection Device (SPD) Type to UL	Strikesorb 30-A-2CHV Surge Suppression
Surge Protective Device (SPD) Type per UL 1449 4th Ed.	Recognized UL SPD
Surge Protection Device (SPD) Class to IEC 61643-11	Class I
Nominal Operating Voltage [U _n]	120V / 240V split phase
Nominal Discharge Current [I _n] per UL 1449 4th Ed.	20 kA 8/20µs
Maximum Discharge Current [I _{max}] per IEC 61643-11	60 kA 8/20µs
Impulse Discharge Current [I _{imp}] per IEC 61643-11	5kA 10/350µs
Maximum Continuous Operating Voltage [U _c] (MCOV)	150V per line
Voltage Protection Level [U _p] per IEC 61643-11	700V
Suppression Technology	MOV
Protection Modes	L1 to Neutral, L2 to Neutral

Standards Compliance & Certifications

Strikesorb modules are compliant to the following Surge Protective Device (SPD) standards:

UL 1449 4th Edition: 2011, IEC 61643-11: 2011, EN 61643-11: 2012, IEEE C62.11: 2005, IEEE C62.41: 2002, IEEE C62.45: 2002, NEMA-LS-1

Certification	UL, VDE, CE
Panel Board Certification	UL 67 (suitable for use as service equipment)

*Additional breakers and sizes are available and sold separately.

Raycap

www.raycap.com



AWG=American Wire Gauge

G02-01-741 200511