

Surge Protective Devices (SPDs) for Bus Systems




Bus Systems

Special features:

- Very high surge ratings
- Equipped with screw or quick connect (spring loaded) terminals
- Different shield handling options available
- The connection lines remain enabled during module replacement

RayDat SBH-3*
RayDat SGH-3
RayDat RS 485
RayDat KNX

*UL Listed

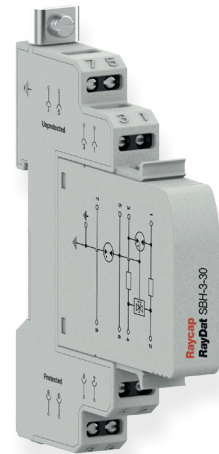

Symbol Legend:



DIN Rail Mounting



Screw Connect Terminals



Quick Connect Terminals



Modular Design



Shield Indirectly Grounded

The RayDat SBH-3 Series of surge protective devices has been developed to protect fieldbus systems (CAN Bus, Profibus DP, RS 232/V.24 m, RS 485, Sinec L2). It is intended for those applications where high ground potential rises may frequently occur, such as in locations close to electric railways.

The RayDat RS 485 has been designed to protect all versions of RS 485. It can be used for protection of RS 422 and V.11 protocol as well.

Coarse protection is provided by a three terminal gas discharge tube (GDT), while fine protection is provided using a high-


speed silicon stage, which provides both, common (longitudinal) mode protection from each line to protective ground and differential (transverse) mode protection between each pair. Care is taken to ensure coordination between these two stages without voltage or surge current blind spots occurring. Thermal protection is provided to reduce the hazards of thermal runaway, should there be an inadvertent mains incursion fault.

RayDat KNX – has been designed to protect KNX systems. Its special design allows the protector to be installed directly to bus terminals.



IEC/EN Category: D1/C1/C2/C3
Surge Discharge Ratings: I_n : 10 kA, I_{max} : 20 kA, I_{imp} : 2.5 kA
Voltages: 5, 12, 30 V DC
Frequency Range: 30 MHz
Housing: Modular Design
Compliance: IEC/EN 61643-21
UL 497B 4th Edition

Configuration:



Technical Data

SBH-3 Series

5
12
30

Electrical

Lines Protected			1 (2 Conductors)	
Nominal Operating Voltage (DC)	U _n	5V	12V	30V
Maximum Continuous Operating Voltage (DC)	U _c	6V	15V	33V
Rated Load Current at 25°C	I _L		1 A	
C2 Nominal Discharge Current (8/20 μs)	I _n		10 kA	
Maximum Discharge Current (8/20 μs)	I _{max}		20 kA	
D1 Impulse Current (10/350 μs)	I _{imp}		2.5 kA	
Residual Voltage at 5 kA (8/20 μs)	(Line-Line) U _{res}	< 22V	< 42V	< 80V
Rated Spark Overvoltage	(SG-Ground)		184-276V	
	(Line-Line)	7-10V	16-19V	35-43V
Response Time Overvoltage Protection	(Line-Line) t _A		< 1 ns	
	(Line-Ground)		< 100 ns	
Insulation Resistance of the Protection	(Line-Ground) R _{iso}		> 1 GΩ/100V	
	(Line-Line)	≥ 6 KΩ	≥ 15 MΩ	≥ 33 MΩ
Serial Resistance per Path	R		1.6-2.0 Ω	
Transverse Capacitance	(Line-Line) C		50 pF	
	(Line-Ground)		5 pF	
Cut-off Frequency	f _G		30 MHz	

Mechanical

Temperature Range	-40 °F to +176 °F [-40 °C to +80 °C]
Terminal Cross Section Multi-strand (max.)	12 AWG
	4 mm ² , 2.5 mm ² Q Version
Terminal Screw Torque	4.5 lbf-in [0.5 Nm]
Degree of Protection IEC/EN 60529	IP 20 (built-in)
Housing Material	Thermoplastic; Grey; Extinguishing Degree V-0
Mounting IEC/EN 60715	35 mm DIN Rail

Order Information


Order Code	5	12	30
SBH-3-xx	7082.86	7082.88	7082.90
SBH-3-xxQ (Quick Connect Terminals)	7085.21	7085.22	7085.23
SBH-3-xxM (module)	7082.87	7082.89	7082.91

RayDat SBH-3 Series



Internal Configuration

Legend

- DB Diode Block
- GDT Gas Discharge Tube
- PG Protective Grounding
- R Resistor
- SG Signal Grounding
- TC Thermo-clip

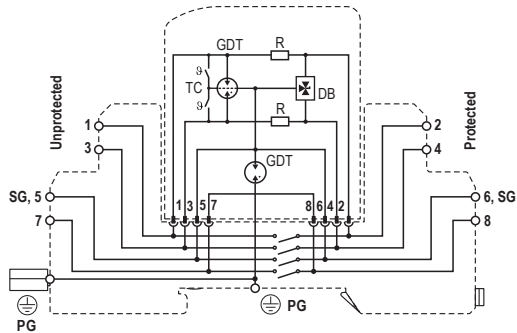


Dimensions & Packaging



SBH-3 Series	5	12	30
Dimensions			
Weight per Unit	2.11 oz [60 g]		
Dimensions DIN 43880	2/3 TE		
Packaging Dimensions (Single Unit)	3.4 x .59 x 4" [87 x 15 x 102 mm]		
Minimum Package Quantity	15 pieces		

SBH-3-xxM Series	5	12	30
Dimensions			
Weight per Unit	.91 oz [26 g]		
Packaging Dimensions (Single Unit)	3.4 x .59 x 4" [87 x 15 x 102 mm]		
Minimum Package Quantity	15 pieces		

Quick Connect Terminals



SBH-3-xxQ Series	5	12	30
Dimensions			
Weight per Unit	2.18 oz [62 g]		
Dimensions DIN 43880	2/3 TE		
Packaging Dimensions (Single Unit)	3.4 x .59 x 4" [87 x 15 x 102 mm]		
Minimum Package Quantity	15 pieces		

inches
[mm]

Information contained in this document is subject to change at any time without notice.



www.raycap.com


© 2020 Raycap All rights reserved.
G29-00-690 201120

DATA SHEET

SPD with Separated Signal Ground (RS 232)

RayDat SGH-3 Series

D1 • C1 • C2 • C3



IEC/EN Category: D1/C1/C2/C3

Surge Discharge Ratings: I_n : 10 kA, I_{max} : 20 kA, I_{imp} : 2.5 kA


Voltages: 5, 12, 15, 24, 30, 48, 60, 110 V DC

Frequency Range: 30 MHz

Housing: Modular Design

Compliance: IEC/EN 61643-21

Configuration:

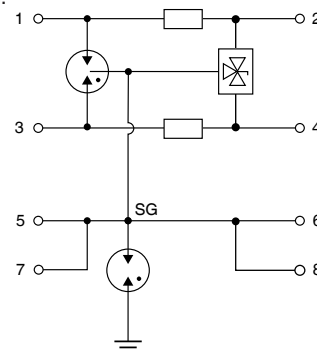

Technical Data

SGH-3 Series

Electrical

		5	12	15	24	30	48	60
Lines Protected		1 (2 Conductors)						
Nominal Operating Voltage (DC)	U_n	5V	12V	15V	24V	30V	48V	60V
Maximum Continuous Operating Voltage (DC)	U_c	6V	15V	18V	28V	33V	52V	64V
Rated Load Current at 25°C	I_L	1 A						
C2 Nominal Discharge Current (8/20µs)	I_n	10 kA						
Maximum Discharge Current (8/20µs)	I_{max}	20 kA						
D1 Impulse Current (10/350µs)	I_{imp}	2.5 kA						
Residual Voltage at 5 kA (8/20µs)	(Line-Line) U_{res}	<22V	<42V	<48V	<70V	<80V	<140V	<160V
Rated Spark Overvoltage	(SG-Ground)	184-276V						
	(Line-Line), (Line-SG)	7-10V	16-19V	20-24V	30-36V	35-43V	55-68V	67-85V
Response Time Overvoltage Protection	(Line-Line) t_A	< 1 ns						
	(Line-Ground)	< 100 ns						
Insulation Resistance of the Protection	(Line-Line) R_{iso}	≥ 6 KΩ	≥ 15 MΩ	≥ 18 MΩ	≥ 28 MΩ	≥ 33 MΩ	≥ 52 MΩ	≥ 64 MΩ
	(Line-Ground)	> 1 GΩ/100V						
Serial Resistance per Path	R	1.6-2.0Ω						
Transverse Capacitance	(Line-Line) C	50 pF						
	(Line-Ground)	5 pF						
Cut-off Frequency	f_G	30 MHz						

Mechanical

Temperature Range	-40 °F to +176 °F [-40 °C to +80 °C]
Terminal Cross Section Multi-strand (max.)	12 AWG [4 mm², 2.5 mm² Q Version]
Terminal Screw Torque	4.5 lbf-in [0.5 Nm]
Degree of Protection IEC/EN 60529	IP20 (built-in)
Housing Material	Thermoplastic; Grey; Extinguishing Degree V-0
Mounting IEC/EN 60715	35 mm DIN Rail

Order Information


Order Code	5	12	15	24	30	48	60
SGH-3-xxx	7086.61	7086.62	7086.63	7086.64	7086.65	7086.66	7086.67
SGH-3-xxxM (module)	7086.69	7086.70	7086.71	7086.72	7086.73	7086.74	7086.75

RayDat SGH-3 Series



Internal Configuration

Legend

- DB Diode Block
- GDT Gas Discharge Tube
- R Resistor
- PG Protective Grounding
- SG Signal Grounding
- TC Thermo-clip

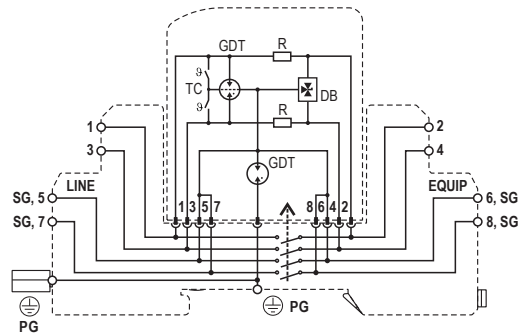

Dimensions & Packaging



SGH-3 Series

5 12 15 24 30 48 60

Dimensions

Weight per Unit	2.11 oz [60g]
Dimensions DIN 43880	2/3 TE
Packaging Dimensions (Single Unit)	3.4 x .59 x 4" [87 x 15 x 102 mm]
Minimum Package Quantity	15 pieces

SGH-3-xxxM Series

5 12 15 24 30 48 60

Dimensions

Weight per Unit	.91 oz [26g]
Packaging Dimensions (Single Unit)	3.4 x .59 x 4" [87 x 15 x 102 mm]
Minimum Package Quantity	15 pieces

inches
[mm]

Information contained in this document is subject to change at any time without notice.

RoHS
COMPLIANT  CE

Raycap

www.raycap.com

© 2020 Raycap All rights reserved.
G29-00-689 201204

DATA SHEET

SPD for RS-485 Systems

RayDat RS 485**D1 • C1 • C2 • C3**

IEC/EN Category: D1/C1/C2/C3
 Surge Discharge Ratings: I_n : 20 kA, I_{imp} : 2.5 kA
 Voltages: 5 VDC
 Max. Operating Voltage: 6 VDC
 Frequency Range: 1 MHz
 Housing: 16 Terminal, Compact Design
 Compliance: IEC/EN 61643-21

**Technical Data****RS 485****Electrical**

Number of Protected Pairs		2(4 Conductors)
Nominal Operating Voltage (DC)	U_n	5V
Maximum Continuous Operating Voltage (DC)	U_c	6V
Rated Load Current at 25°C	I_L	500 mA
C2 Nominal Discharge Current (8/20µs) (Line-Line)	I_n	20 kA
D1 Impulse Current (10/350µs)	I_{imp}	2.5 kA
Residual Voltage at 5 kA (8/20µs) (Line-Line)	U_{res}	20V
Rated Spark Overvoltage (5, 6, 7 & 8-4, SG)		6.5V – 8.5V
(5-6 & 7-8)		6.5V – 8.5V
(5,6,7 & 8-2, PG)		78V – 116V
Response Time Overvoltage Protection (5,6,7,8,SG)	t_A	< 1 ns
Thermal Protection (5,6,7,8)		Yes
Insulation Resistance of Protection	R_{iso}	6 kΩ
Serial Resistance per Path	R	1.7 – 1.9 Ω
Transverse Capacitance	C	< 2 nF
Cut-off Frequency	f_G	> 1 MHz

Mechanical

Temperature Range	-40 °F to +176 °F [-40 °C to +80 °C]
Terminal Cross Section Multi-strand (max.)	2x14 AWG [2x2.5 mm ²]
Terminal Screw Torque	17.7 lbf.in [2.0 Nm]
Degree of Protection IEC/EN 60529	IP 20 (built-in)
Housing Material	Thermoplastic; Grey; Extinguishing Degree V-0
Mounting IEC/EN 60715	35 mm DIN Rail

Order Information


Order Code	
RS 485	703 812

RayDat RS 485


Internal Configuration

Legend

- BD Bi-directional TVS Diode
- GDT Gas Discharge Tube
- PG Protective Grounding
- R Resistor
- SG Signal Grounding
- TC Thermo-clip

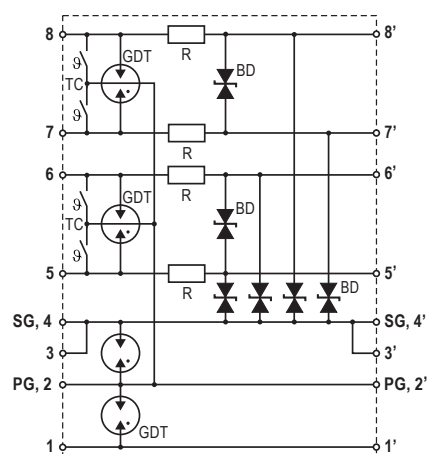

Dimensions & Packaging

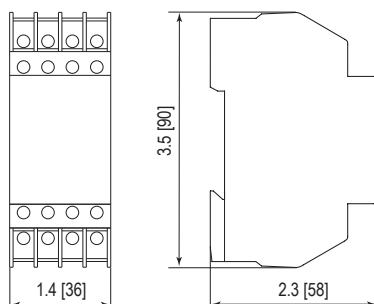

RS 485

Dimensions

Weight per Unit	4.02 oz [114 g]
Dimensions DIN 43880	2TE
Packaging Dimensions (Single Unit)	1.5 × 2.9 × 4.2" [39 × 74 × 106 mm]
Minimum Package Quantity	6 pieces

inches
[mm]

Information contained in this document is subject to change at any time without notice.

RoHS
COMPLIANT  CE


Raycap

www.raycap.com

© 2020 Raycap All rights reserved.
G29-00-045 201120

DATA SHEET

SPD with Terminal Connection for Bus Systems

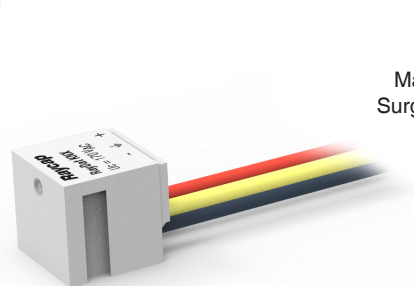RayDat KNX**D1 • C1 • C2 • C3**

IEC/EN Category: D1/C1/C2/C3

Voltages: 110V DC

Max. Operating Voltage: 180V DC

Surge Discharge Ratings: I_n : 5 kA, I_{max} : 10 kA

Series Load Current: 7 A

Housing: Compact Design

Compliance: IEC/EN 61643-21

**Technical Data****RayDat KNX****Electrical**

Number of Protected Pairs		1 (2 conductors)
Nominal Operating Voltage (DC)	U_n	110V
Maximum Continuous Operating Voltage (DC)	U_c	170V
Rated Load Current at 25°C	I_L	7 A
C2 Nominal Discharge Current (8/20µs)	I_n	5 kA
Maximum Discharge Current (8/20µs)	I_{imp}	1 kA
Residual Voltage at 5 kA (8/20µs)	U_{res} (Line-Ground) (Line-Line)	<600V
		<1000V
Response Time Overvoltage Protection	t_A	<100 ns
Thermal Protection		No
Insulation Resistance of the Protection	R_{iso}	$\geq 1 \text{ G}\Omega$
Serial Resistance per Path	R	<0.1 Ω
Cut-off Frequency	f_G	50 MHz

Mechanical

Temperature Range	-40 °F to +176 °F [-40 °C to +80 °C]
Line Conductors Cross Section (max.)	20 AWG [0.5 mm ²]
Ground Conductor Cross Section (max.)	18 AWG [0.75 mm ²]
Connecting Conductor Length	5.9" [150 mm]
Degree of Protection IEC/EN 60529	IP 20 (built-in)
Housing Material	Thermoplastic; Grey; Extinguishing Degree V-0


Order Information

Order Code	
RayDat KNX	127 649


RayDat KNX

Internal Configuration

Legend
GDT Gas Discharge Tube
PG Protective Grounding



Dimensions & Packaging



RayDat KNX	
Dimensions	
Weight per Unit	.28 oz [8 g]
Packaging Dimensions (Single Unit)	3.1 x .91 x .43" [78 x 23 x 108 mm]
Minimum Package Quantity	12 pieces

inches
[mm]

Information contained in this document is subject to change at any time without notice.

RoHS COMPLIANT  CE