




Features

- LCD screen displays number of surges, hour, minute and date of surge event
- Buttons for TIME/DATE setting and log viewing
- Replaceable battery, lifetime up to two years
- Easy to install, snap-on surge current sensor
- Complies with: IEC 62561-6
- EN/IEC CATEGORY: Type I, Type II

Typical Installation

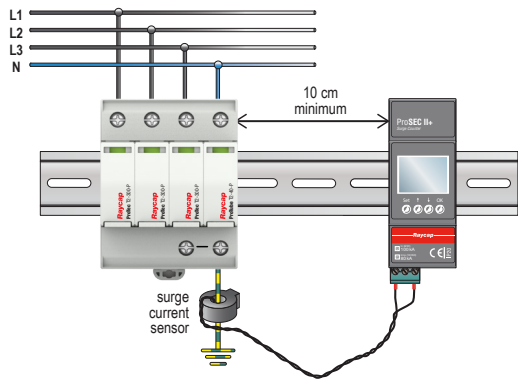


inches [mm]

The ProSEC II+ is a surge counter with additional functionality. Besides counting the number of surges, it also logs the hour and date of each surge counted. This additional time and date logging function makes it possible to pinpoint the exact time of every surge and correlate it with equipment and power supply problems inside of a facility or structure.

Technical Data

Electrical	
ProSEC II+ Order Code	130 100
Minimal Discharge Current (8/20) [ $I_{min}$ ]	100 A
Nominal Discharge Current (8/20) [ $I_n$ ]	100 kA
Minimum Impulse Discharge Current (10/350) [ $I_{imp min}$ ]	100 A
Impulse Discharge Current (10/350) [ $I_{imp}$ ]	80 kA
Power Supply	Replaceable CR17335 lithium battery Lifetime up to two years
Maximum Events Logged	999
Mechanical	
Mounting Method EN 60715	35 mm DIN rail
Maximum Wired Diameter through Current Sensor	0.55" [14 mm]
Sensor Cable	19.7" [0.5 m]
Temperature Range	-4 °F to +158 °F [-20 °C to +70 °C]
Environmental Ingress Protection (IP) Rating	IP 20
Enclosure Material	Thermoplastic; Extinguishing degree UL 94 V-0
Packaging Dimension (L x W x D)	4.33" x 1.65" x 3.27" [110 x 42 x 83 mm]
Dimensions DIN 43880	2 TE
Weight	.33 lbs [150 g]
Standards Compliance & Certifications	
Standards	IEC 62561-6
EN/IEC Category	Type I, Type II
Certification	RoHS, CE
Product Diagram	



Information contained in this document is subject to change at any time without notice. No part of this document may be reproduced or used without written permission from Raycap.