

Accessories
ProAcc ZP-TB**40mm Busbar Power Feed Input Terminal Block**

Location of Use: Meter panels per DIN VDE 0603-1 and DIN VDE 0603-2-1 with 40mm Busbar System 12x5mm

Compliance: IEC 61984
EN 61984
DIN EN 61984
VDE-AR-N 4100
DIN VDE 0603-1
DIN VDE 0603-2-1
DIN VDE 18015-1

Technical Data**ProAcc ZP-TB****IEC Electrical**

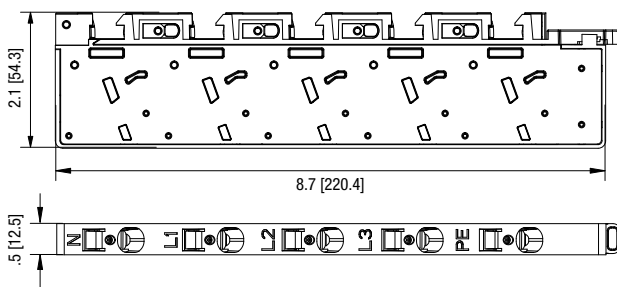
Rated Voltage (AC) per IEC 61984	U_N	240/400V
Rated Current per IEC 61984	I_N	101 A
Nominal Current		125 A
Rated Isolation Voltage per IEC 61984	U_i	400V
Rated Impulse Voltage per IEC 61984	U_{imp}	6kV
Rated Short Circuit Current per VDE-AR-N 4100		25kA
Number of poles		5

Mechanical & Environmental

Pollution degree		3
Operating Temperature Range	T_a	-13 °F to +131 °F [-25 °C to +55 °C]
Permissible Operating Humidity	RH	5%...95%
Altitude (max)		6561 ft [2000 m]
Wire Connection Method		Tension clamp
Connectivity		One conductor per clamping unit
Conductor Cross Section (max)		1.5 - 25 mm ² (Solid, Stranded) / 1.5 - 16 mm ² (Flexible) 15 - 4 AWG (Solid, Stranded) / 15 - 5 AWG (Flexible)
Mounting		40mm Busbar System 12x5mm
Degree Of Protection		IP 00 IP20 when installed behind the protective cover
Housing Material		Thermoplastic: Extinguishing Degree UL 94 V-0

Order Information

Order Code	
ProAcc ZP-TB	515 669

Dimensions & Packaging inches [mm]**Complete Unit Dimensions & Packaging****ProAcc ZP-TB**

Weight	pounds [grams]	.33 [150]
Packaging Dimensions (HxWxL)		.78x2.3x9.5"
		20x60x242 mm
Standard Order Quantity		1 Unit

Information contained in this document is subject to change at any time without notice.