DATASHEET

Lightning and Overvoltage Protection with Integrated Fuse

ProTec T1SF 3+0

Class I • Class II • Class III • Type 1 • Type 2 • Type 3



Location of Use: Main Distribution Boards
Network Systems: TN-C
Mode of Protection: L-PEN
IEC/EN Category: Class I+II+III, Type 1+2+3
Housing: Pluggable Design
Compliance: IEC 61643-11: 2011
EN 61643-11: 2012+A11:2018

RoHS COMPLIANT

Technical Data


ProTec T1SF-xxx-3+0(-R)		275
IEC Electrical		
Nominal AC Voltage (50/60Hz)	U_o/U_n	240 V
Maximum Continuous Operating Voltage (AC)	U_c	275 V
Nominal Discharge Current (8/20 µs)	I_n	25 kA
Maximum Discharge Current (8/20 µs)	I_{max}	65 kA
Impulse Discharge Current (10/350 µs)	I_{imp}	25 kA
Specific Energy	W/R	156.2 kJ/Ω
Charge	Q	12.5 As
Open Circuit Voltage of Combination Wave Generator (1.2/50 µs)	U_{oc}	6 kV
Short Circuit Current of Combination Wave Generator (8/20 µs)	I_{cw}	3 kA
Voltage Protection Level	U_p	1900 V
Response Time	t_A	< 100 ns
Overvoltage Category		III
Overcurrent Protection (max)		Not Required
Short-Circuit Current Rating (AC)	I_{SCCR}	100 kA
Follow Current Interrupt Rating (AC)	I_{fi}	100 kA
TOV Withstand 120min	U_T	442 V
Number of Ports		1
Additional Electrical Parameters *(Tests performed within Raycap testing laboratory only)*		
Residual Voltage at 5 kA (8/20 µs)	U_{res}	1200 V
Minimum Backup fuse, if required		Not required
Mechanical & Environmental		
Operating Temperature Range	T_a	-40 °F to +185 °F [-40 °C to +85 °C]
Permissible Operating Humidity	RH	5%...95%
Pollution Degree		2
Altitude		6562 ft [2000 m]
Terminal Screw Torque	M_{max}	40 lbf·in [4.5 Nm]
Conductor Cross Section (max)		2 AWG (Solid, Stranded)/4 AWG (Flexible)
		35 mm² (Solid, Stranded)/25 mm² (Flexible)
Mounting		35 mm DIN Rail, EN 60715
Degree of Protection		IP 20 (built-in)
Housing Material		Thermoplastic: Extinguishing Degree UL 94 V-0
Operating State/Fault Indication		Green Flag/Not Green Flag
Remote Contacts (RC)		Optional
RC Switching Capacity		AC: 250 V/1A, 125 V/1 A; DC: 48 V/0.5 A, 24 V/0.5 A, 12 V/0.5 A
RC Conductor Cross Section (max)		16 AWG (Solid)/1.5 mm² (Solid)
Overvoltage Category		III

Information contained in this document is subject to change at any time without notice.
No part of this document may be reproduced or used without written permission from Raycap.

Internal Configuration

Legend


L	*Line Conductor Terminal*
⏚	*PE Conductor Terminal*
RC	*Remote Contacts Terminal (Optional)*
TD	*Thermal Disconnector*
F	*Integrated Surge Adapted Backup Fuse*

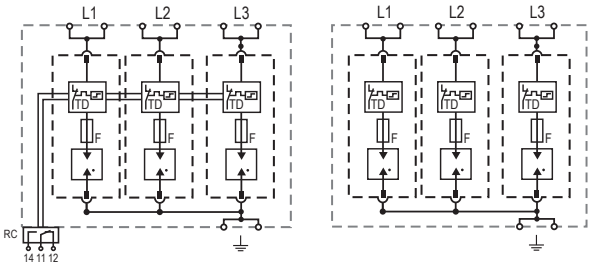

Order Information	
Order Code	**275**
ProTec T1SF-xxx-3+0	59.C170
ProTec T1SF-xxx-3+0-R (with remote contacts)	59.C171
ProTec T1SF-xxx-P (plug)	59.A502


Dimensions & Packaging

inches [mm]

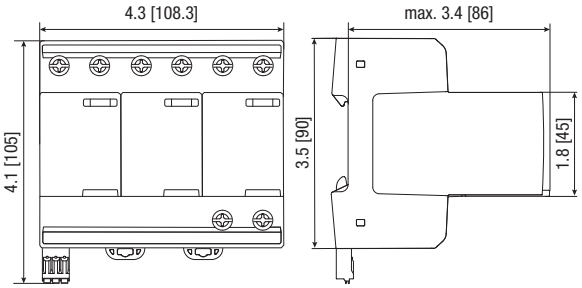

Complete Unit		
ProTec T1SF-xxx-3+0		**275**
Weight	pounds [grams]	1.892 [858]
ProTec T1SF-xxx-3+0-R		
Weight	pounds [grams]	1.914 [868]
DIN 43880 Dimension		6 TE/4.3" [108.3 mm]
Packaging Dimensions (H x W x L)		4.3 × 4.5 × 13.8" [109 × 115 × 352 mm]
Standard Order Quantity		3 Units

Spare Plug



Single Unit		
ProTec T1SF-xxx-P		**275**
Weight	pounds [grams]	.427 [194]
DIN 43880 Dimension		2TE/1.42" [36 mm]
Packaging Dimensions (H x W x L)		4.3 × 4.5 × 13.8" [109 × 115 × 352 mm]
Standard Order Quantity		14 Units

© 2026 Raycap All rights reserved.