

Surge Protective Device RSE Series 3



Features

- 50kA – 200kA per mode
- UL 1449 Listed
- Stacked MOV Design
- Low Voltage Protection Ratings
- 20kA I-nominal Ratings
- 200kA SCCRs
- Advanced TOV/Surge Counter w/ time & date stamping
- 10 Year Standard Warranty

Product Specifications

General Specifications

Maximum Surge Current Rating Range	50kA - 200kA Per Mode
UL Type Designation	Type 1 & Type 2 w/ Filtering
UL 1449 I-nominal Rating	20kA
UL 1449 Short Circuit Current Rating	200kA
Repetitive Impulse	10,000 hits per mode
Response Time	<1 ns
EMI/RFI Filtering	-50dB from 10kHz to 100MHz

Design Specifications

Stacked MOV design for High Energy Handling in Category C locations
Distribution Grade 34mm Thermally Protected MOVs
External Parallel Connected for Mounting next to Electrical Gear
All Modes of Protection (L-N, L-G, N-G, L-L)
Thru-Door Rotary Disconnect (Optional)

Diagnostic Monitoring Specifications

2 Tri-Color LEDs per phase (Standard)
Audible Alarm (Standard)
PIC Micro Controller w/ rotatable Graphics LCD (Standard)
Surge/TOV Counter w/ Time & Date stamp (Standard)
Form C Dry Contact, 240V, 5A (Standard)
Push to Test Function (Standard)
Full Color LCD Touch Screen Display (Optional)
Real Time Voltage/Current Power Quality Monitor (Optional)
Event Log w/ Time & Date Stamp (Optional)
Embedded Web Page (Optional)
User Settable Alarm Thresholds (Optional)
Percent Protection Remaining (Optional)

Physical Specifications

Humidity Range	0-95% non-condensing
Operating Frequency	0-600Hz
Operating Temperature	-25°C to +75°C
Typical Connection	#6 AWG 60 A breaker (Rotary Disconnect accepts up to 2/0 AWG)

UL 1449 Performance Data

System Voltage	L-N	L-G	N-G	L-L	SCCR	MCOV
240/120V Split Ø	800	800	800	1800	200kA	175
480/240V Split Ø	1200	1200	1200	2500	200kA	320
208Y/120V	700	700	700	900	200kA	150
480Y/277V	1200	1200	1200	2000	200kA	320
600Y/347V	1500	1500	1500	2500	200kA	440
240V Hi-Leg Delta	800	1000	800	1200	200kA	175/275
480V Hi-Leg Delta	1200	1800	1200	2000	200kA	350/550
240V 3Ø Delta	-	1000	-	1000	200kA	280
480V 3Ø Delta	-	1800	-	1800	200kA	550
600V 3Ø Delta	-	1800	-	2000	200kA	680
120V Single 1Ø	800	800	800	-	200kA	175
240V Single 1Ø	1200	1200	1200	-	200kA	275
277V Single 1Ø	1200	1200	1200	-	200kA	320
347V Single 1Ø	1500	1500	1500	-	200kA	420

Standards Compliance & Certifications

UL 1449 5th Edition: 2021, cULus, UL1283 (UL File: VZCA.E316468), UL 96A Compliant, ANSI/IEEE C62.41.1-2002, C62.41.2-2002, C62.45-2002, NEC Article 285, ISO 9001:2014 Quality Management System, ISO 17025:2007 Laboratory Certification (UL DAP Program), 100% Quality Tested prior to shipping, Made in the USA


Surge Protective Device RSE Series 3

Model Number Configuration


RSE-3-120-3Y-A-20-S-D-F-S

Series	Voltage	Electrical System	Mode	kA per Mode	Enclosure	Disconnect	Filtering	Options
RSE-3	120	1P = Single Phase	A = All Mode	05 = 50kA	S = 11" x 17" x 5" Steel - Small	S = No Disconnect	F = Filtering	S = Surge & TOV Counter
	240	2S = Split Phase		10 = 100kA		D = Disconnect	0 = Type 1, No Filtering	T = Touch Screen
	277	3Y = 3 Phase WYE		15 = 150kA			C = Type 2, No Filtering	
	347	3D = 3 Phase Delta		20 = 200kA				
	480	3H = 3 Phase Hi-Leg						
	600							

Wiring Configurations

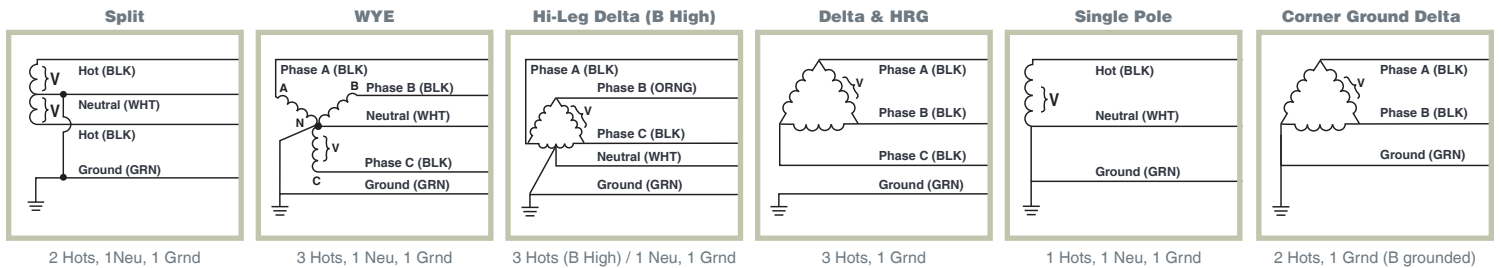

Product Diagram

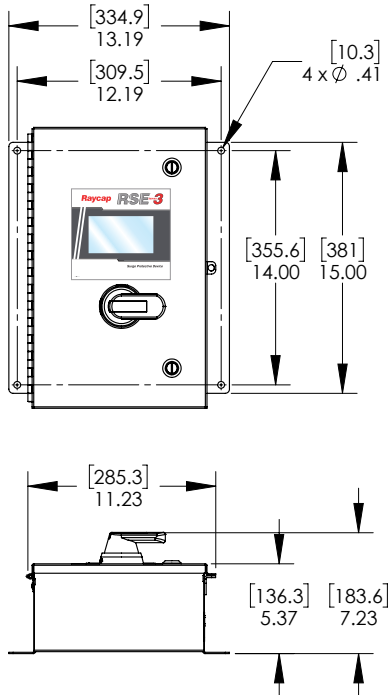

Size and Mechanical Specifications

Dimensions	16.79" x 13.19" x 7.23"
Weight	18.2 lbs
Enclosure Type	Steel NEMA 4
Installation Type	Indoor / Outdoor
Mounting Method	Flange